

W+ Series - 60Hz Curve Book

SANITARY CENTRIFUGAL PUMPS



TABLE OF CONTENTS:

60 Hz Curves:	Page:
W+ 10/8 Model.....	4
W+ 22/20 Model – Low Flow Impeller.....	5-6
W+ 22/20 Model.....	7-8
W+ 25/210 Model.....	9
W+ 30/80 Model.....	10-11
W+ 30/120 Model.....	12-13
W+ 35/35 Model – Low Flow Impeller.....	14-15
W+ 35/35 Model.....	16-17
W+ 35/55 Model.....	18-19
W+ 50/8 Model.....	20-21
W+ 55/35 Model.....	22-23
W+ 55/60 Model.....	24-25
W+ 60/110 Model.....	26-27
W+ 65/350 Model.....	28-29
W+ 70/40 Model.....	30-31
W+ 80/80 Model.....	32-33
W+ 110/130 Model.....	34-35
W+ 140/50 Model.....	36-37

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.205 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+10/8 CENTRIFUGAL PUMP CAPACITY CURVE
1.5" INLET - 1" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 4.3"
 Performance data refer to water at 68°F
 Provisional

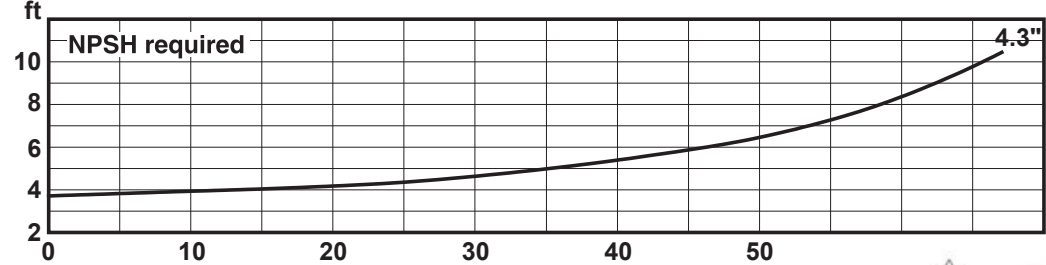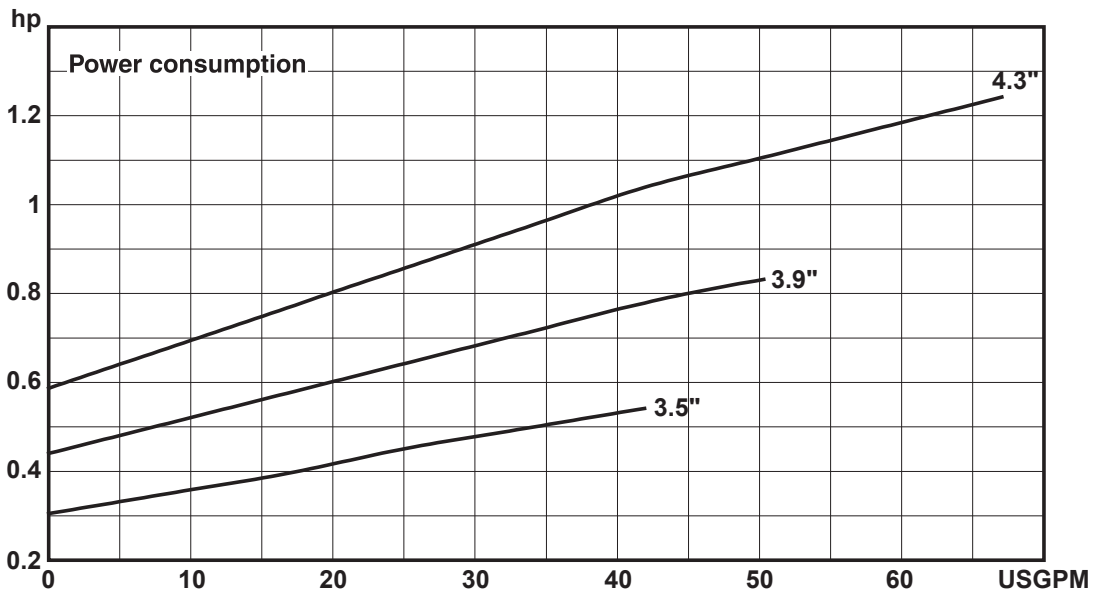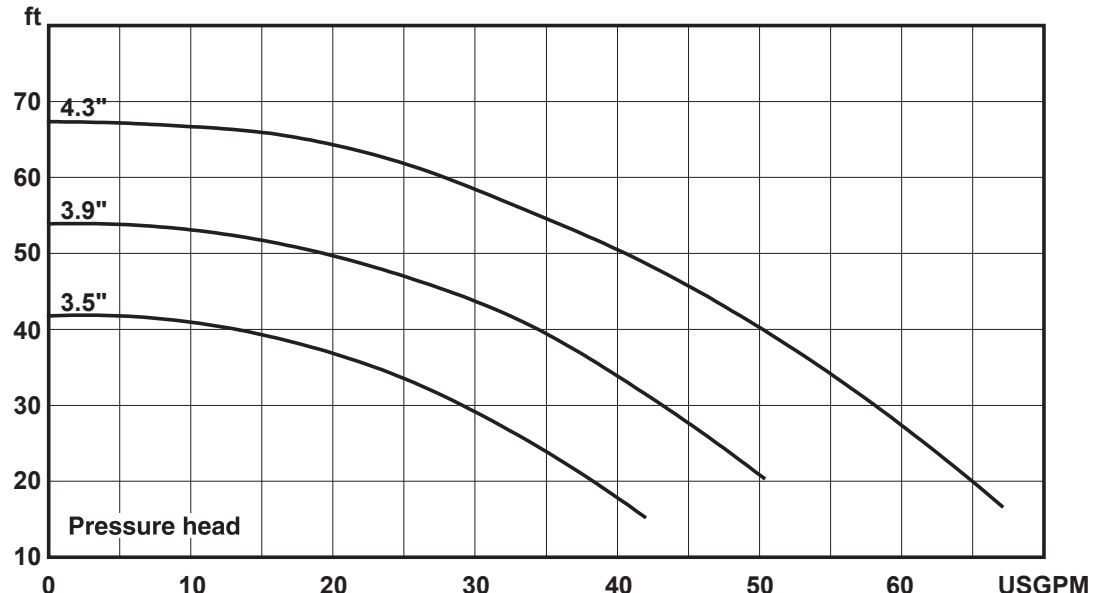

CANCELS
DATED
1-1-97





W+SERIES
453402 ISS U 10.08

EFFECTIVE 1-11-08

W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE
2" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 5.6" - Low Flow Impeller
Performance data refer to water at 68°F
Provisional

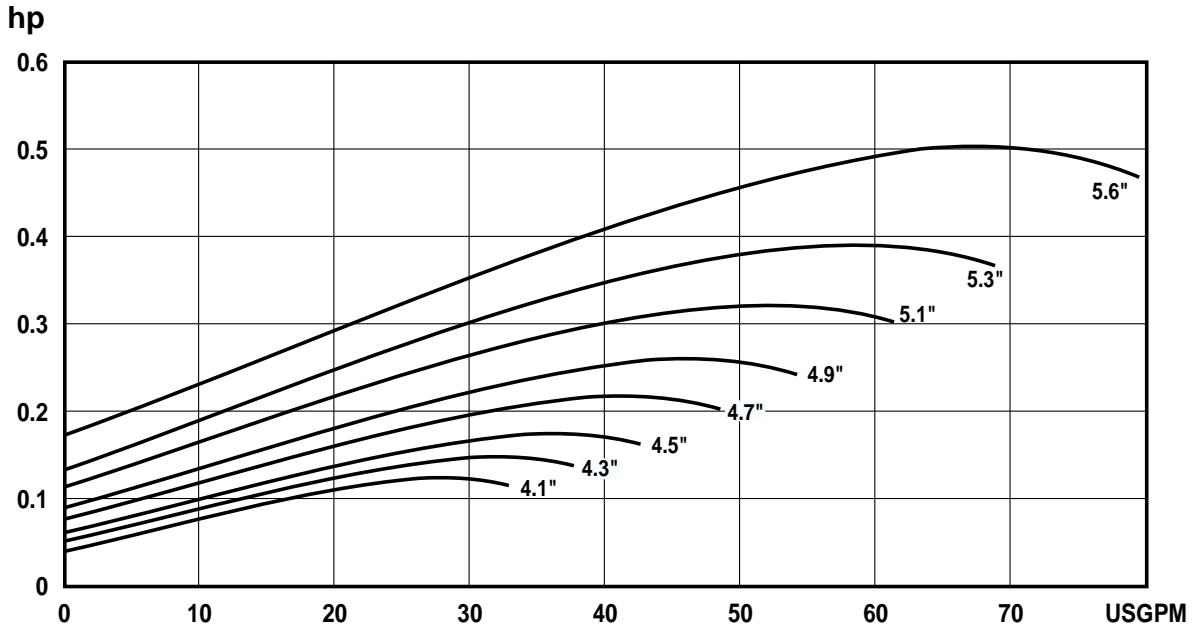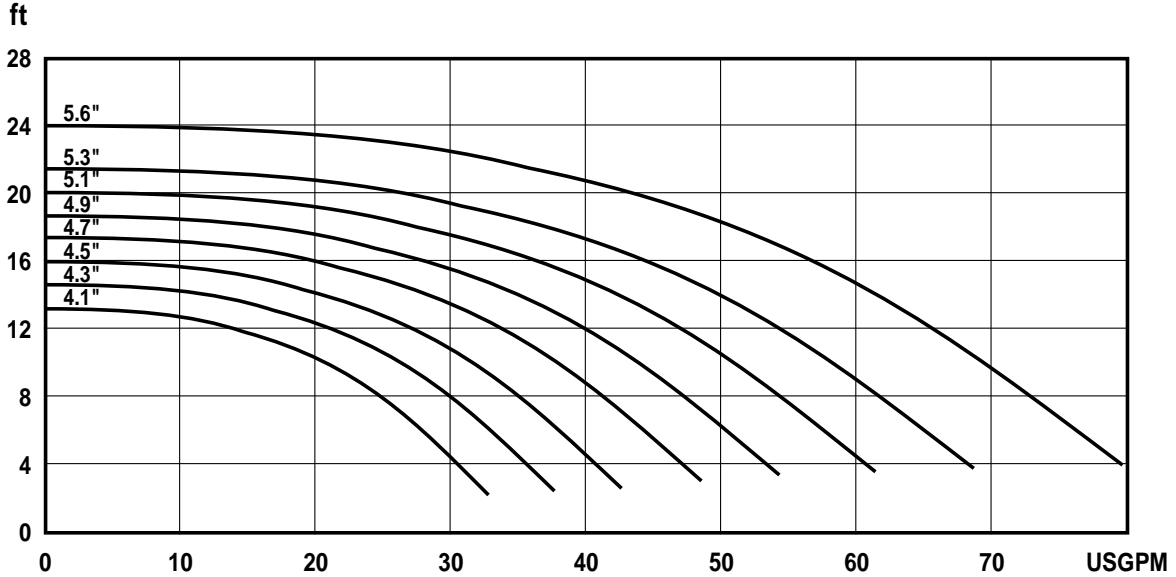

CANCELS
DATED
1-1-97





W+SERIES
453402 ISS U 10.08

EFFECTIVE 1-11-08

W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE 2" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____ Impeller dia: Max: 5.6" - Low Flow Impeller
_____ Performance data refer to water at 68°F
_____ Provisional


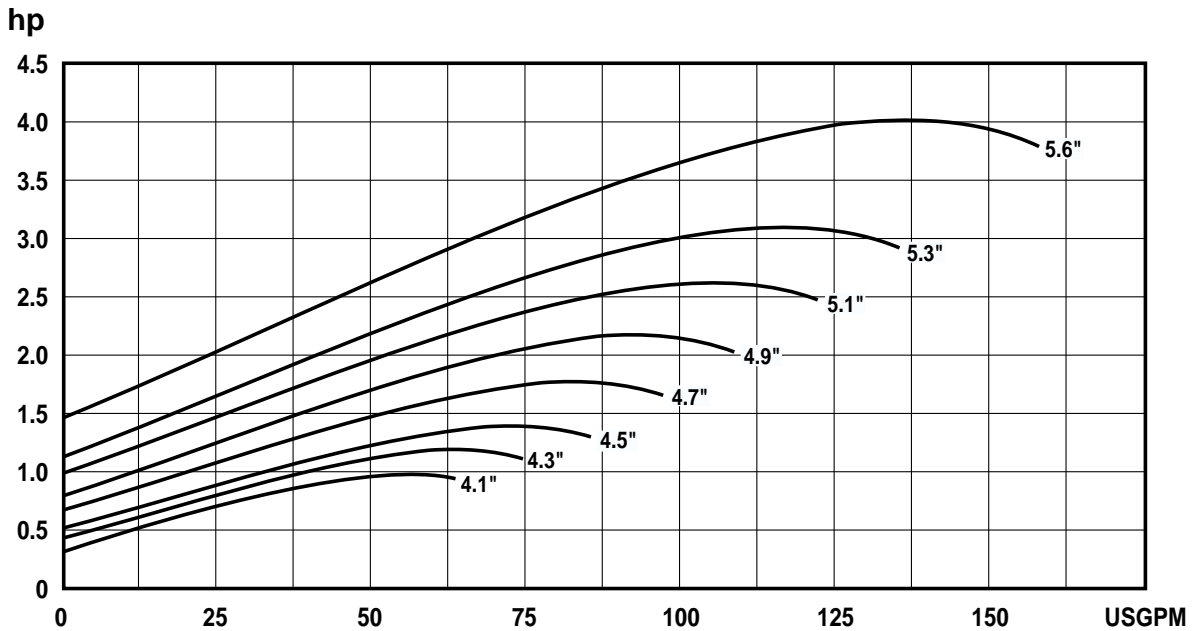
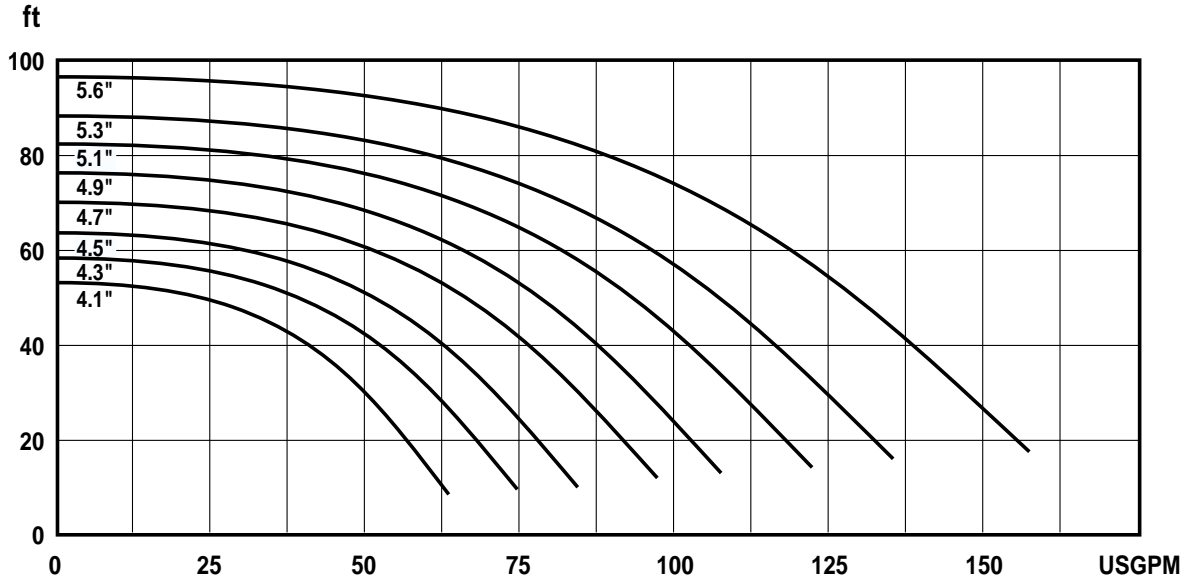




W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE
2" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 5.6"
 Performance data refer to water at 68°F
 Permissible tolerance \pm 5%

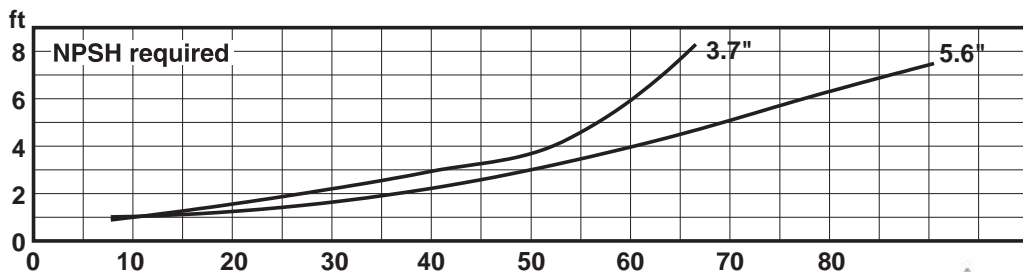
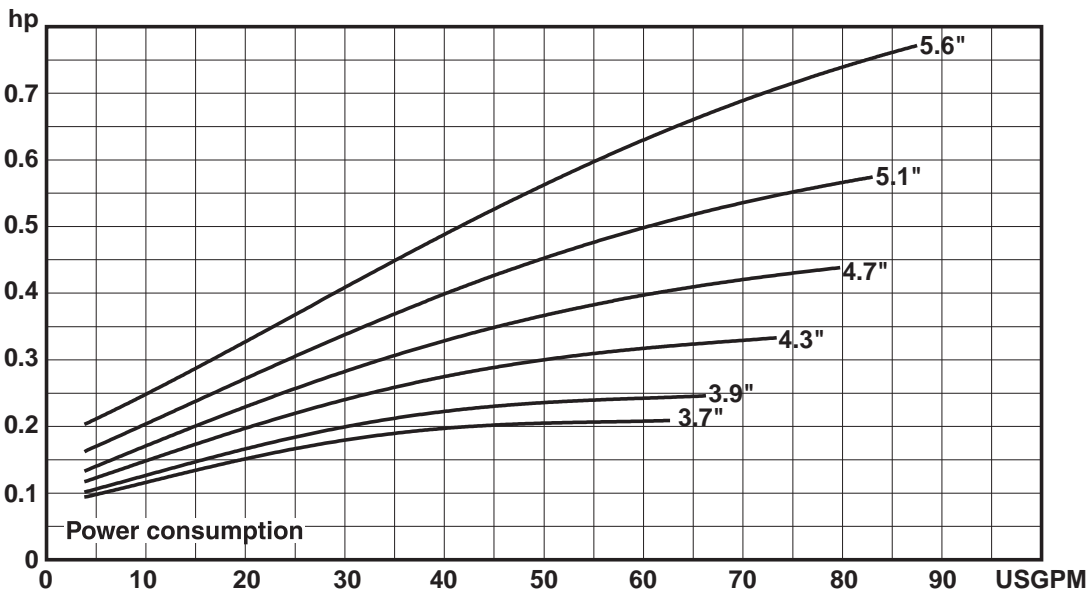
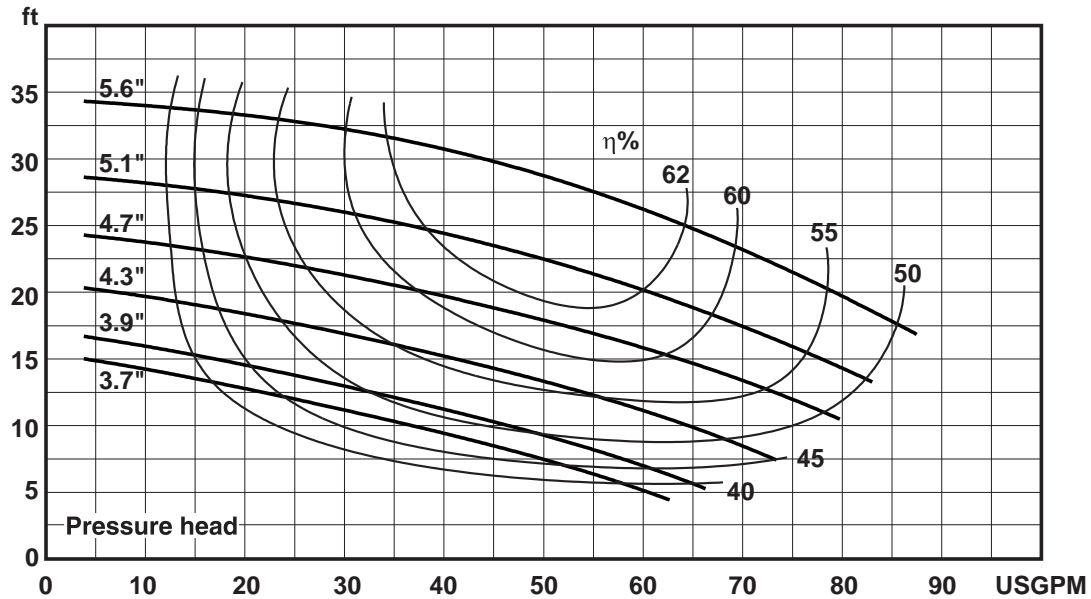




W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE
2" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 5.6"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

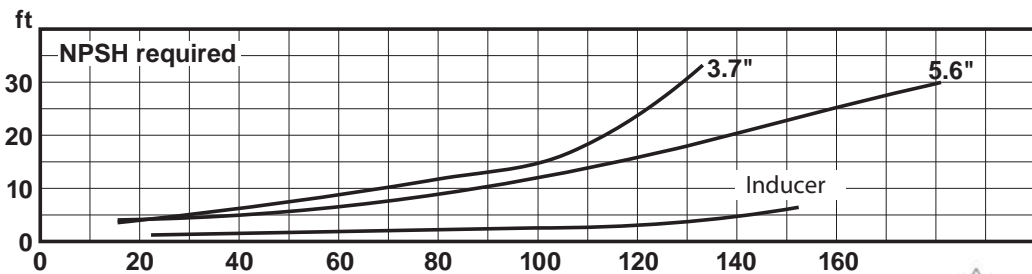
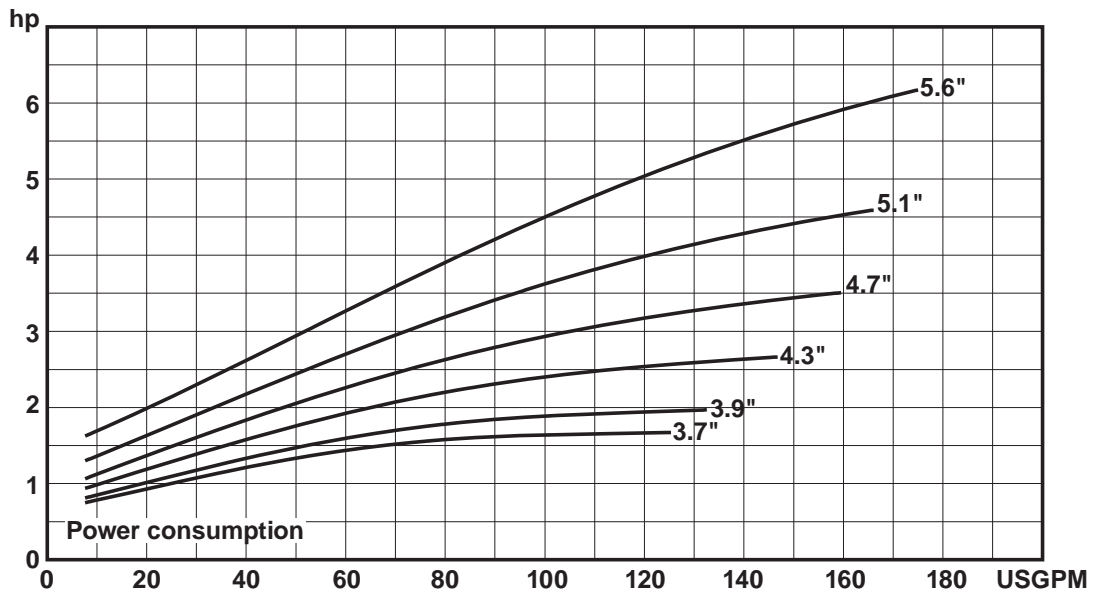
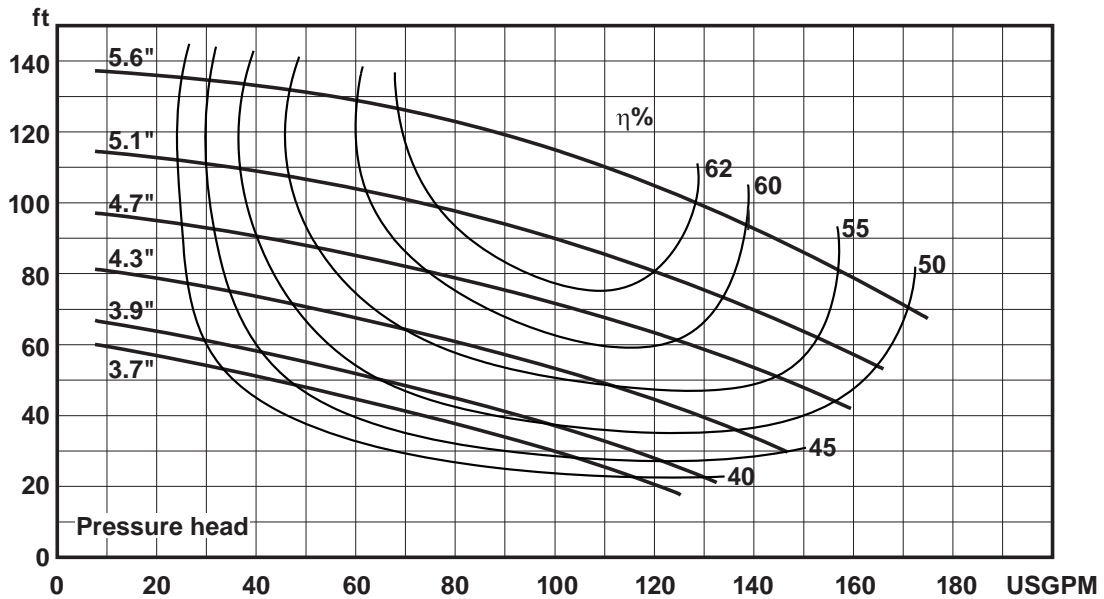




W+ SERIES MODEL W+25/210 CENTRIFUGAL PUMP CAPACITY CURVE
6" INLET - 4" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 11.4"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

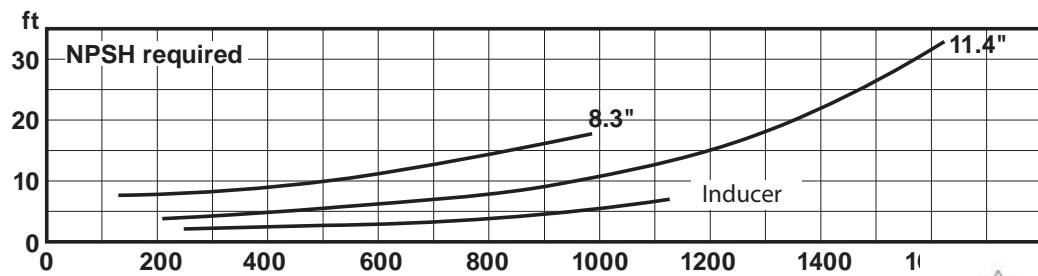
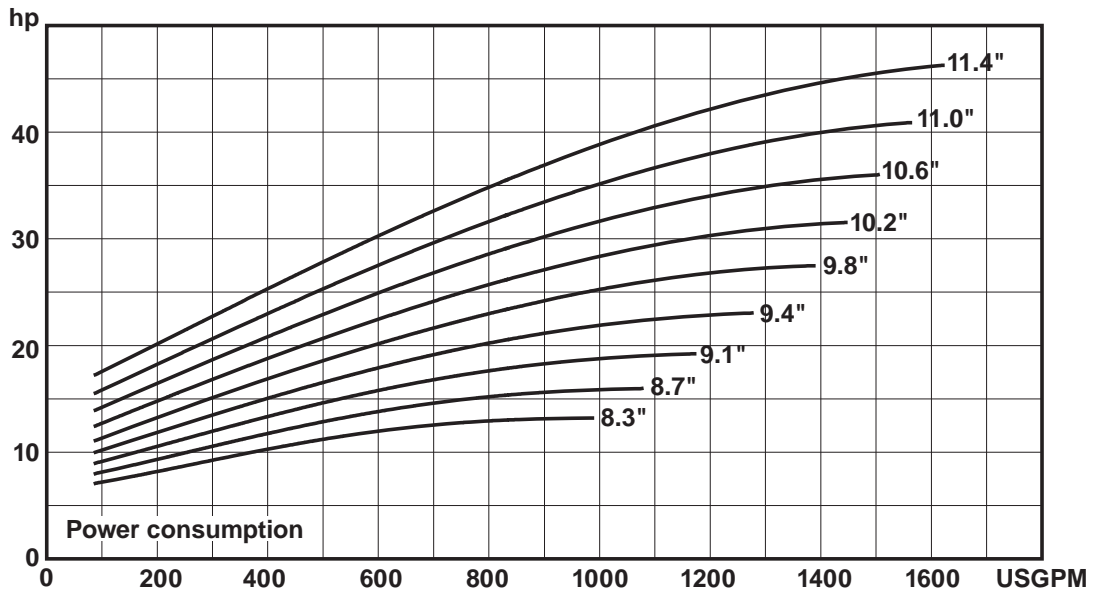
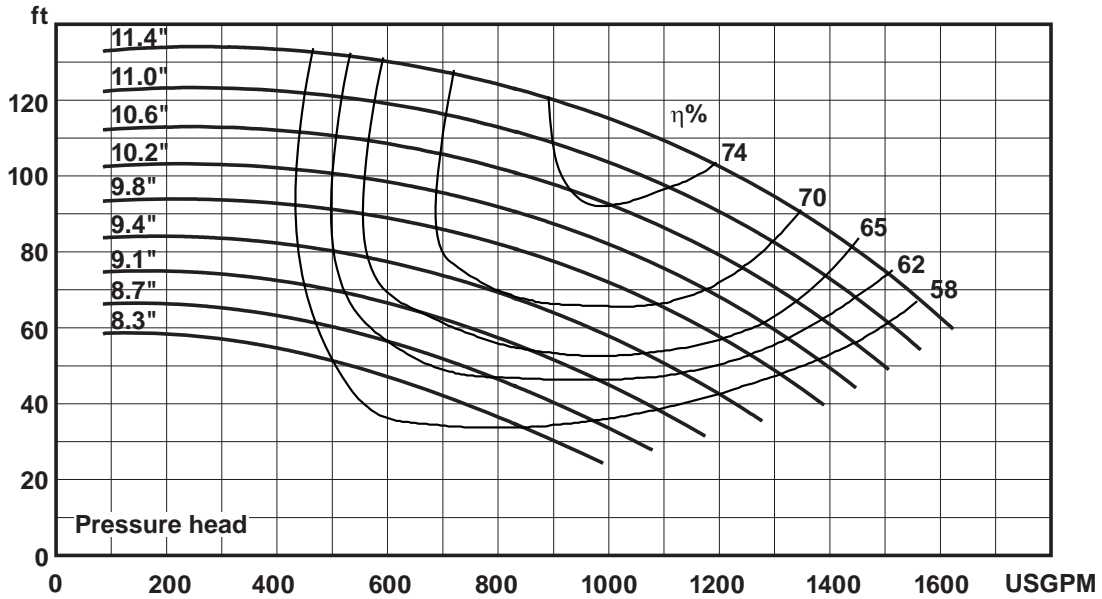




W+ SERIES MODEL W+30/80 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.7"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

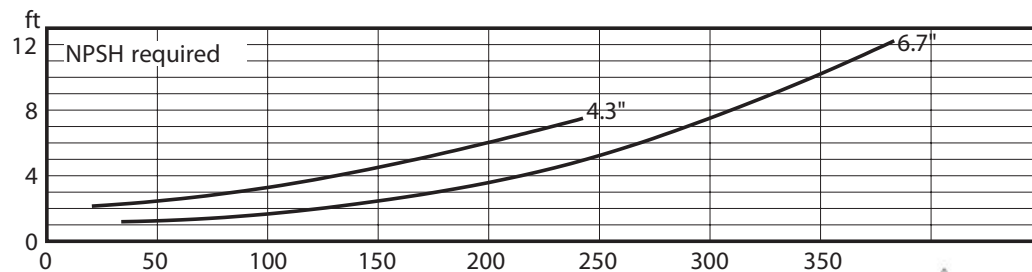
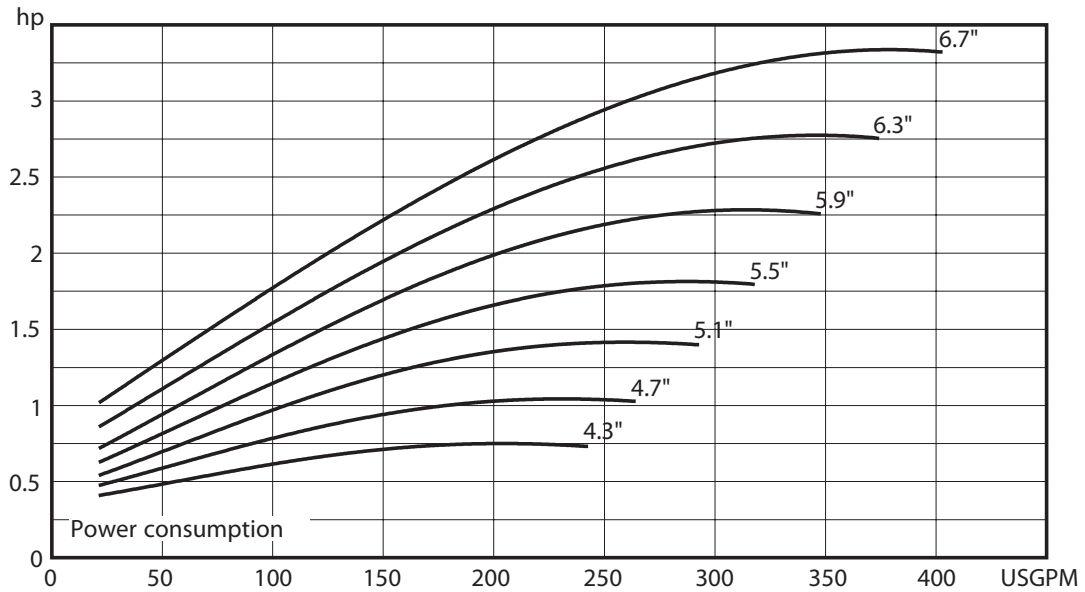
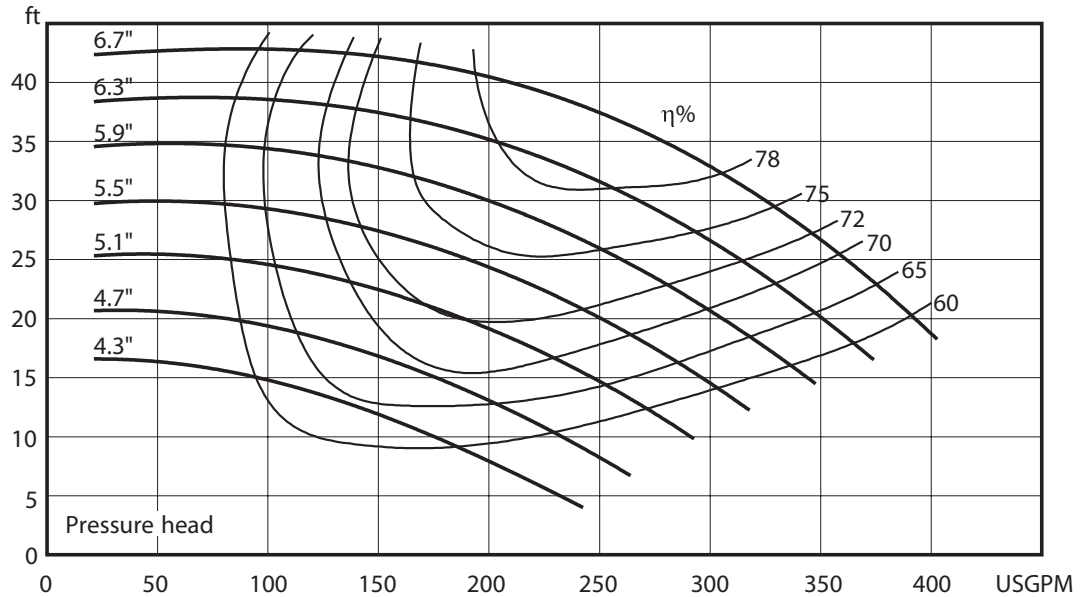




W+ SERIES MODEL W+30/80 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.7"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

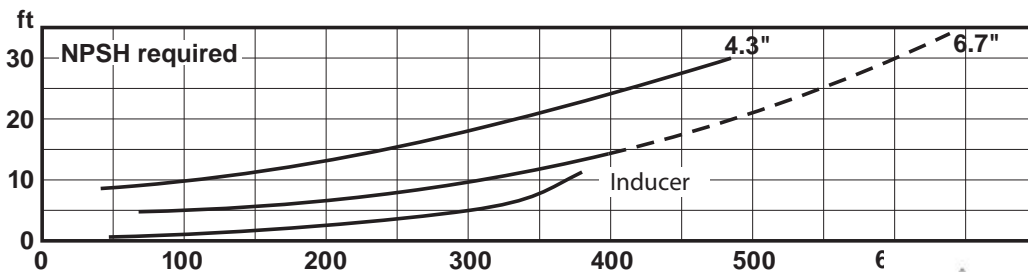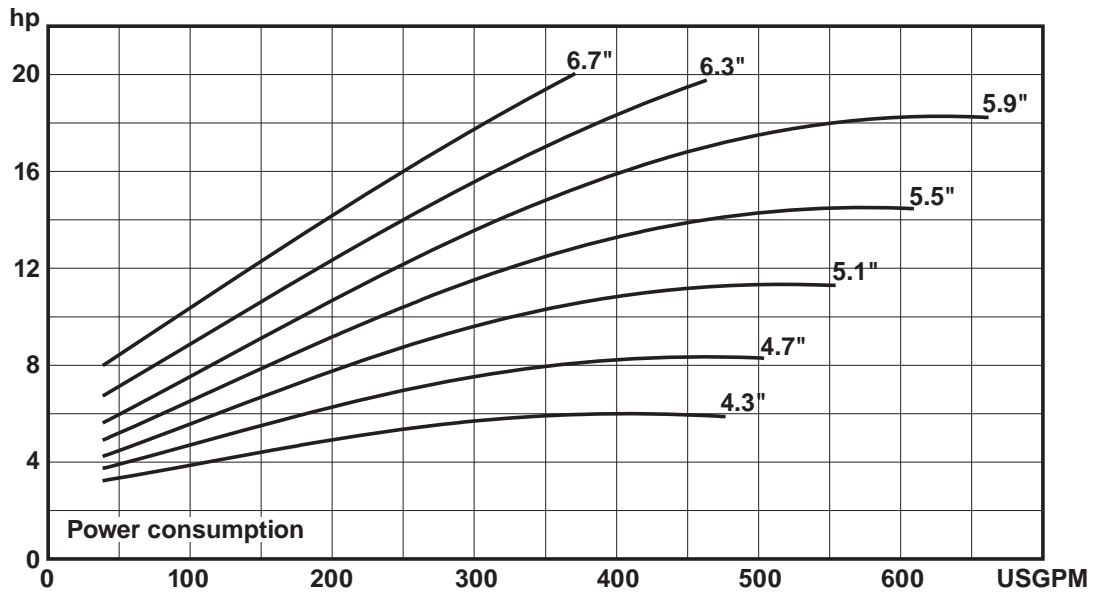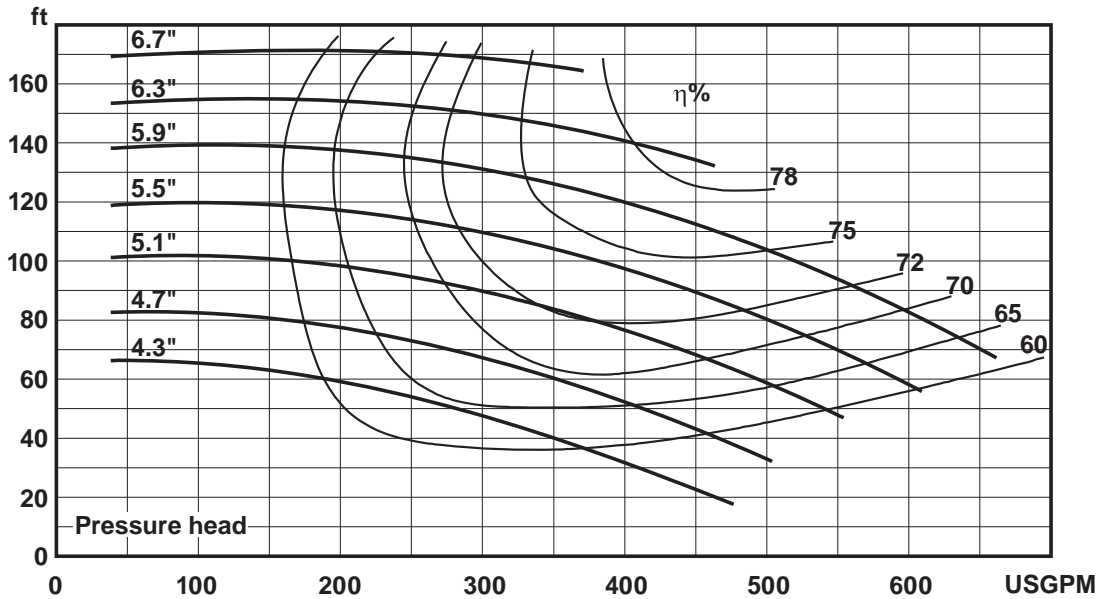

CANCELS
 DATED
 1-1-97




W+SERIES
 A-1-201.225 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+30/120 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.9"
 Performance data refer to water at 68°F
 Permissible tolerance $\pm 5\%$



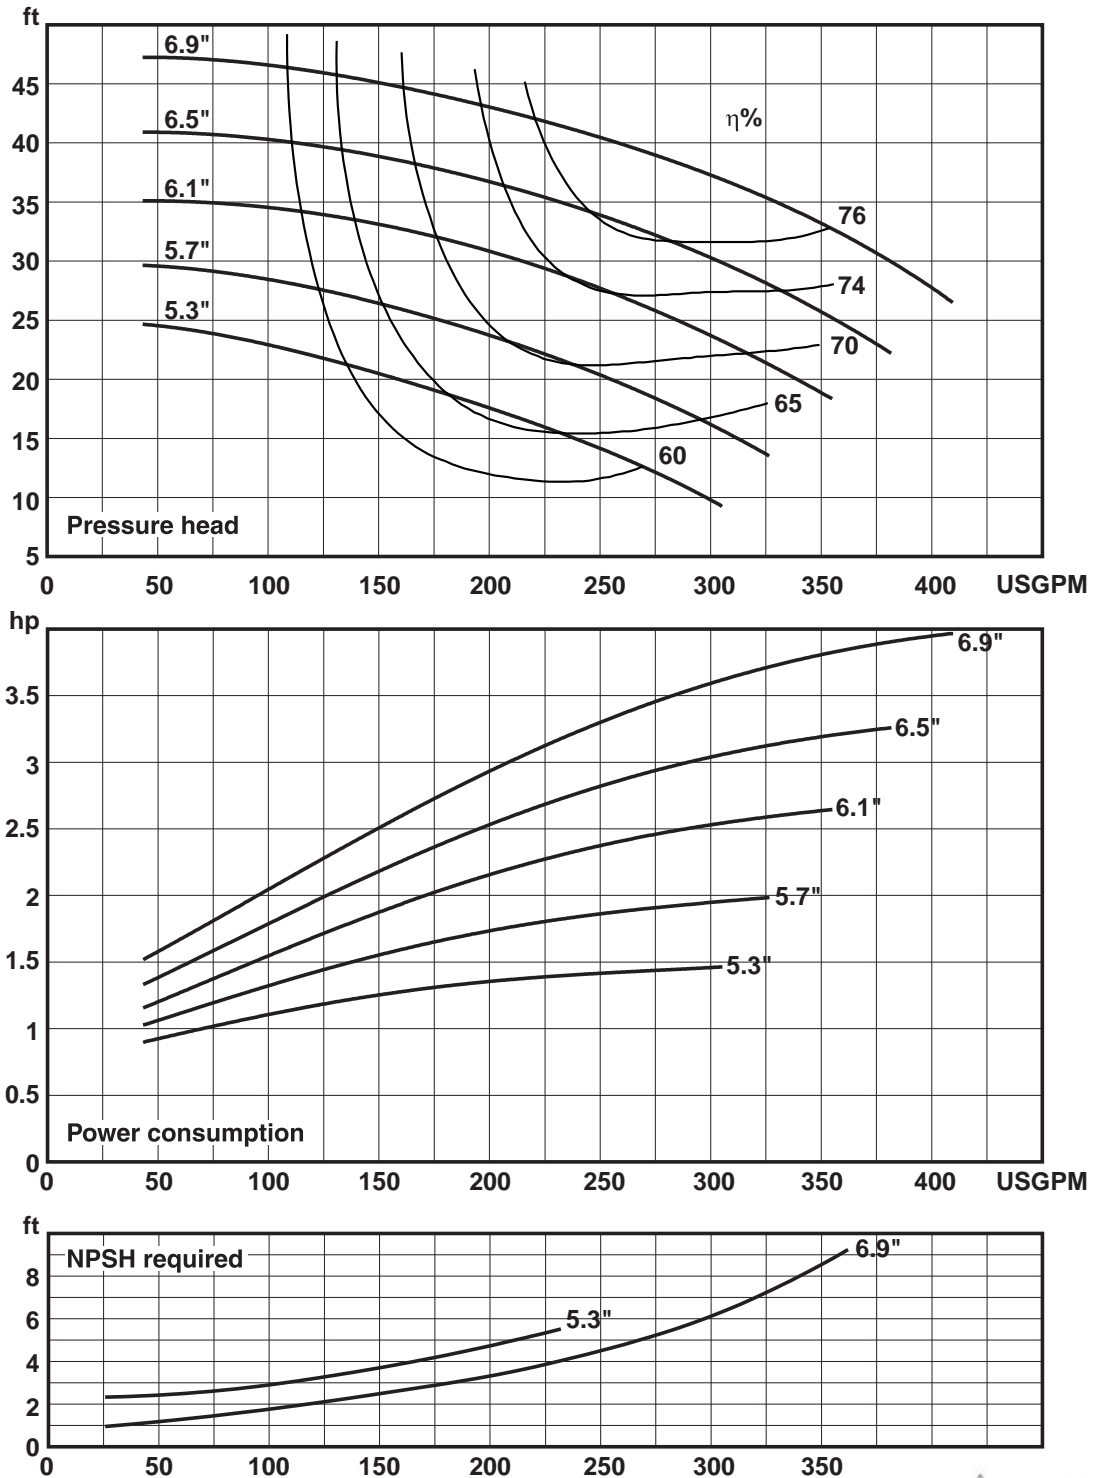




W+ SERIES MODEL W+30/120 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.9"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

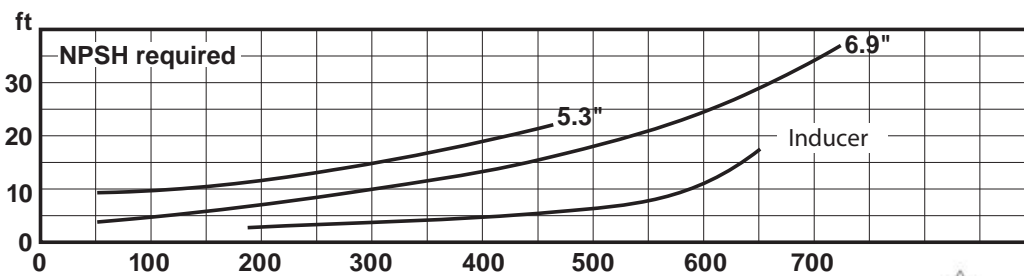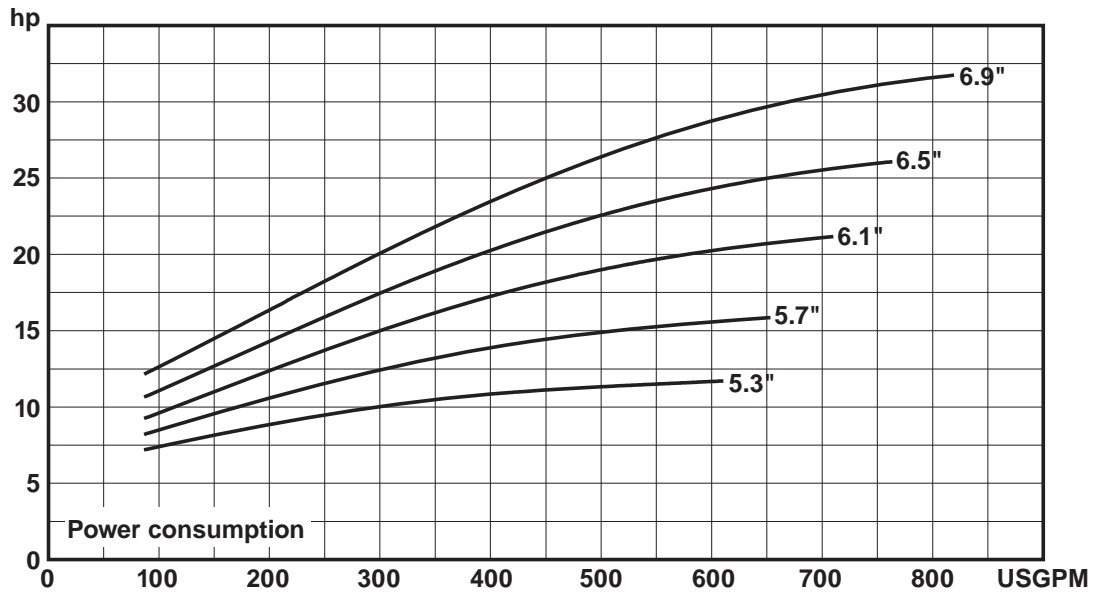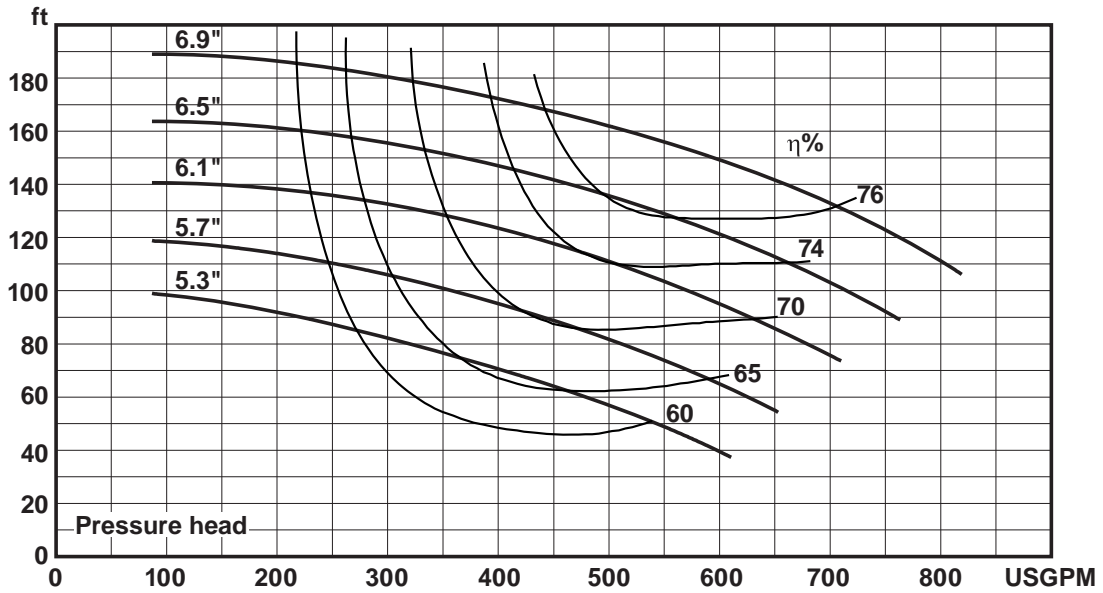

CANCELS
DATED
1-1-97





W+SERIES
453402 ISS U 10.08

EFFECTIVE 1-11-08

W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE 2.5" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____ Impeller dia: Max: 6.9" - Low Flow Impeller
_____ Performance data refer to water at 68°F
_____ Provisional

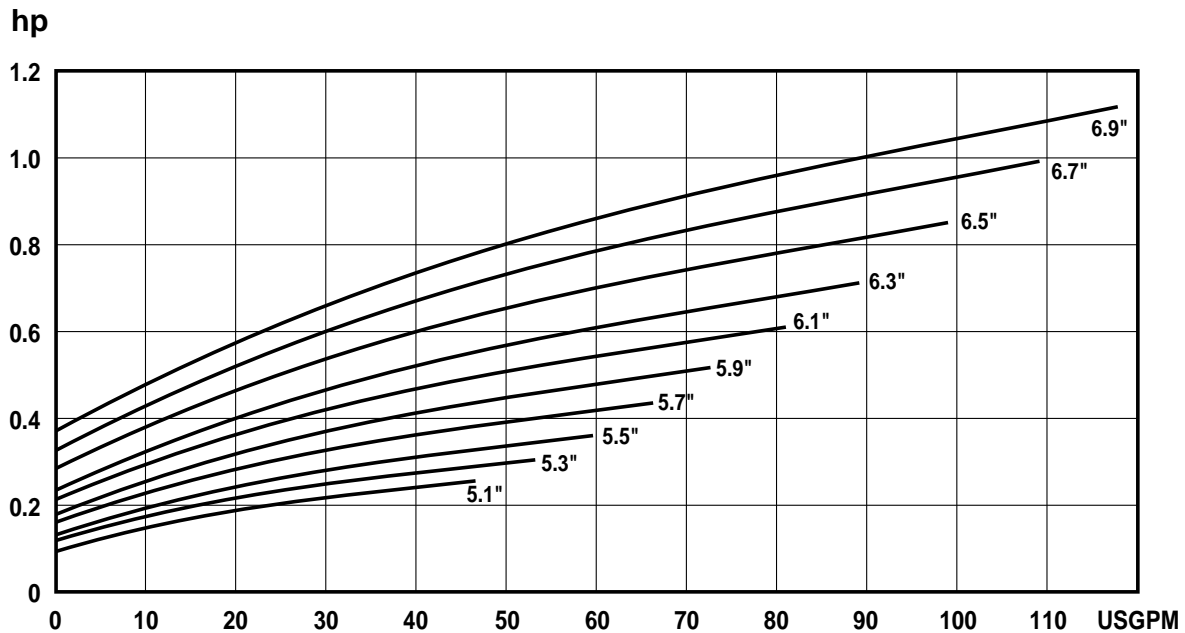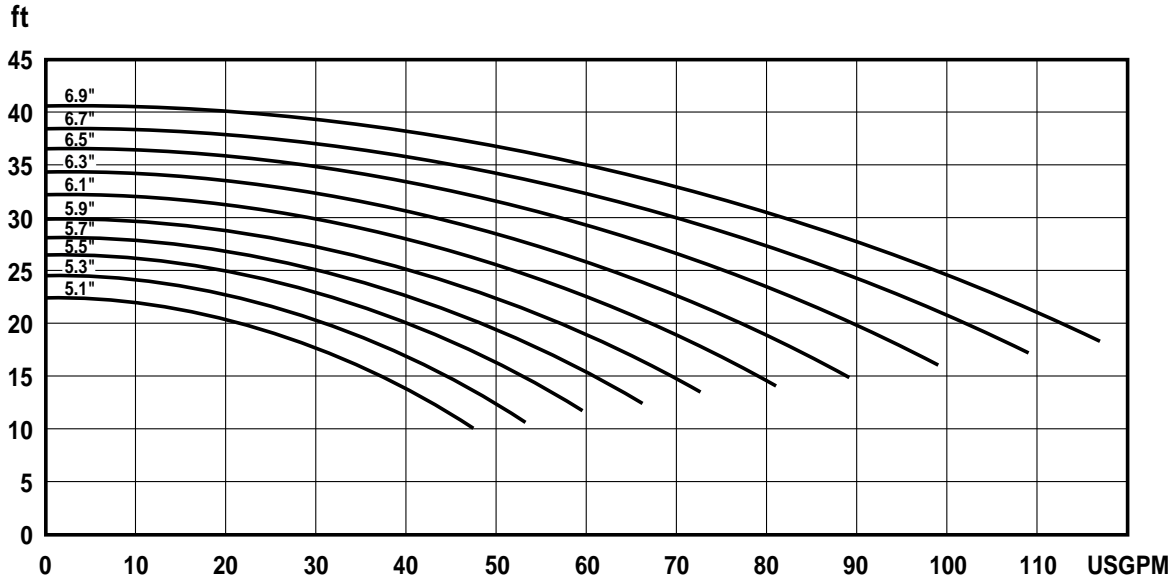

CANCELS
DATED
1-1-97





W+SERIES
453402 ISS U 10.08

EFFECTIVE 1-11-08

W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE 2.5" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____ Impeller dia: Max: 6.9" - Low Flow Impeller
_____ Performance data refer to water at 68°F
_____ Provisional

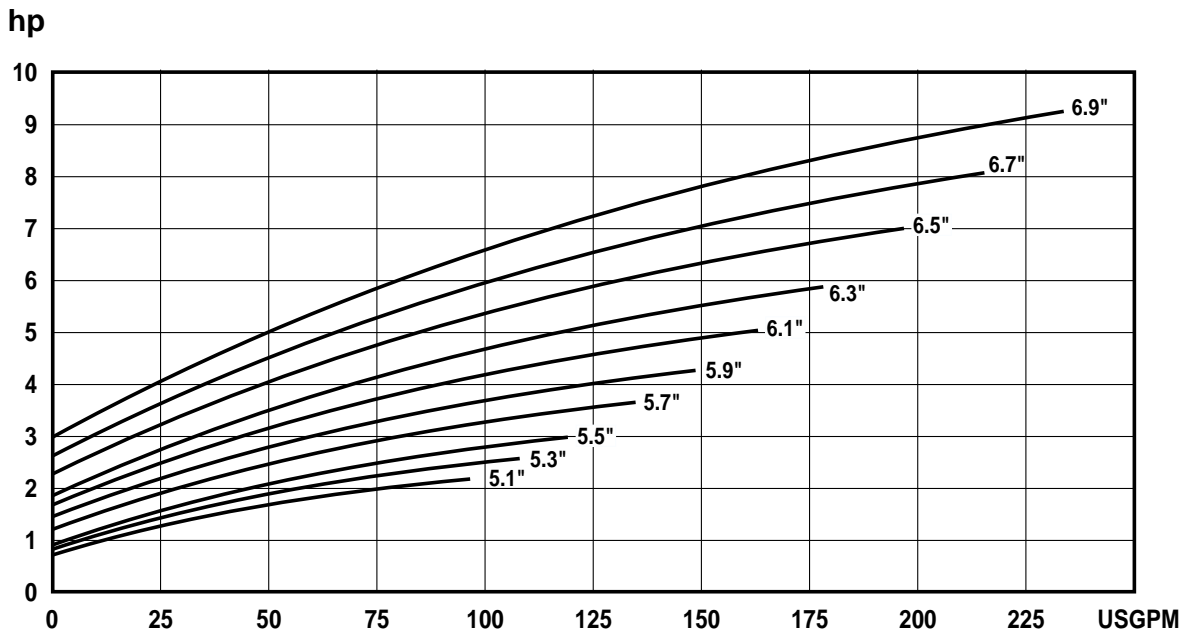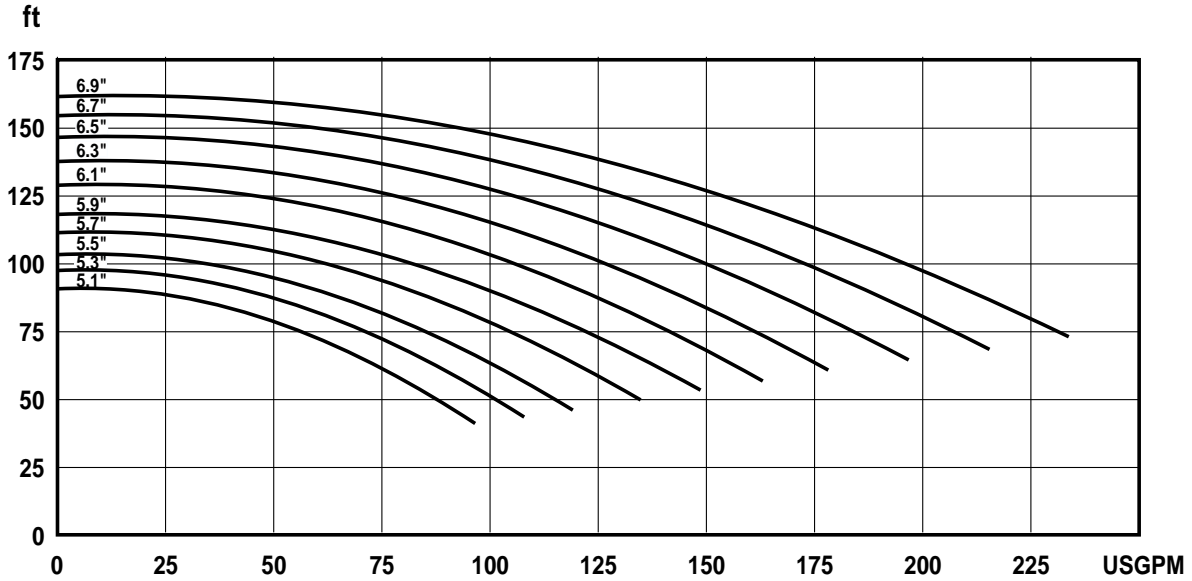

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.230 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.9"
 Performance data refer to water at 68°F
 Permissible tolerance \pm 5%

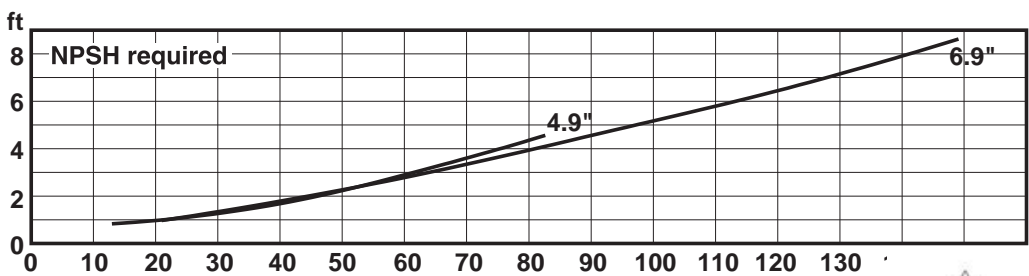
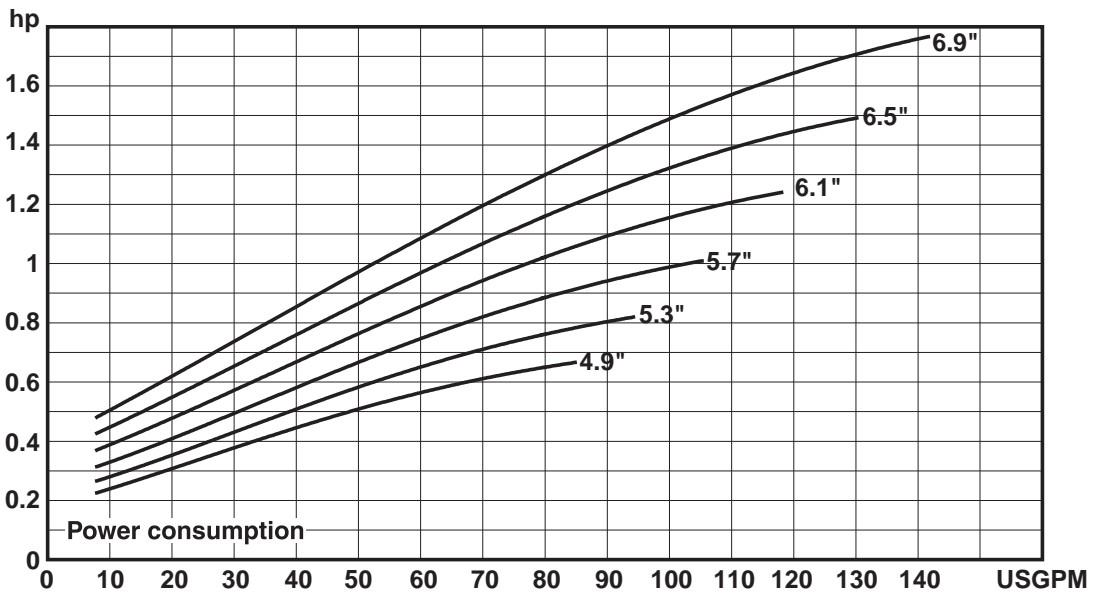
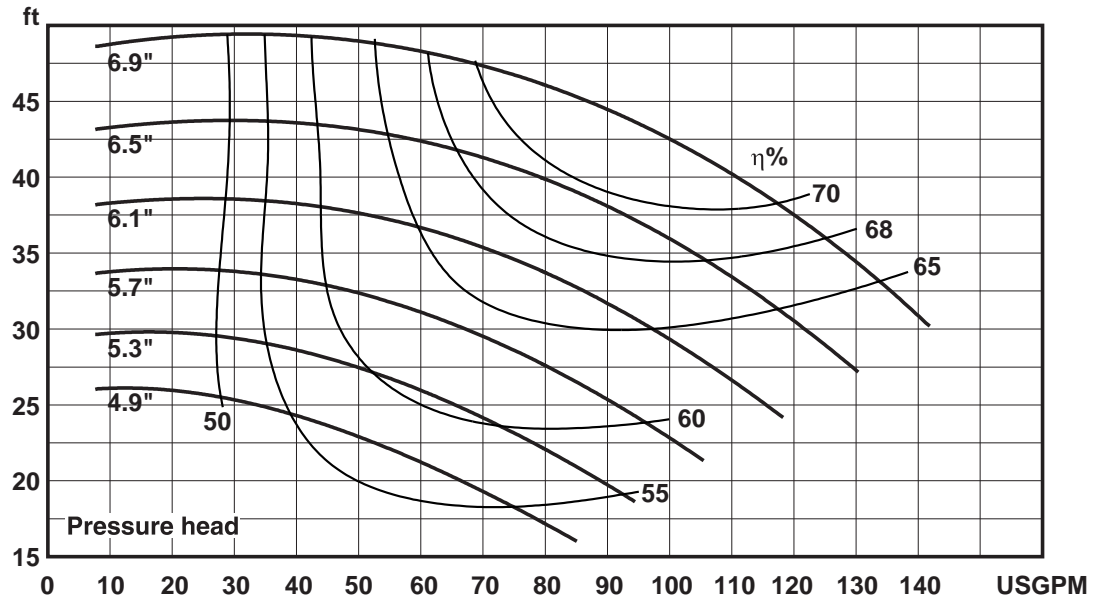




W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.9"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

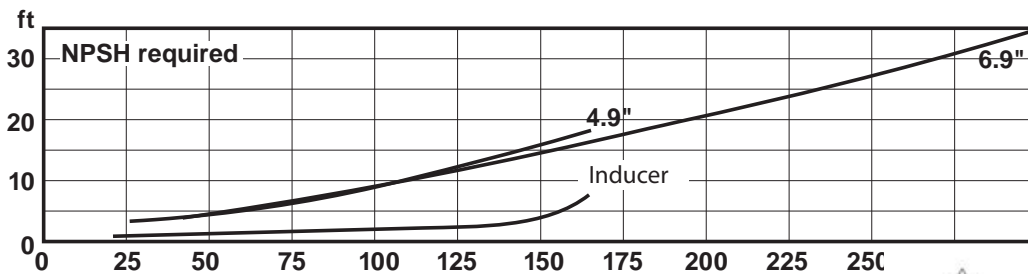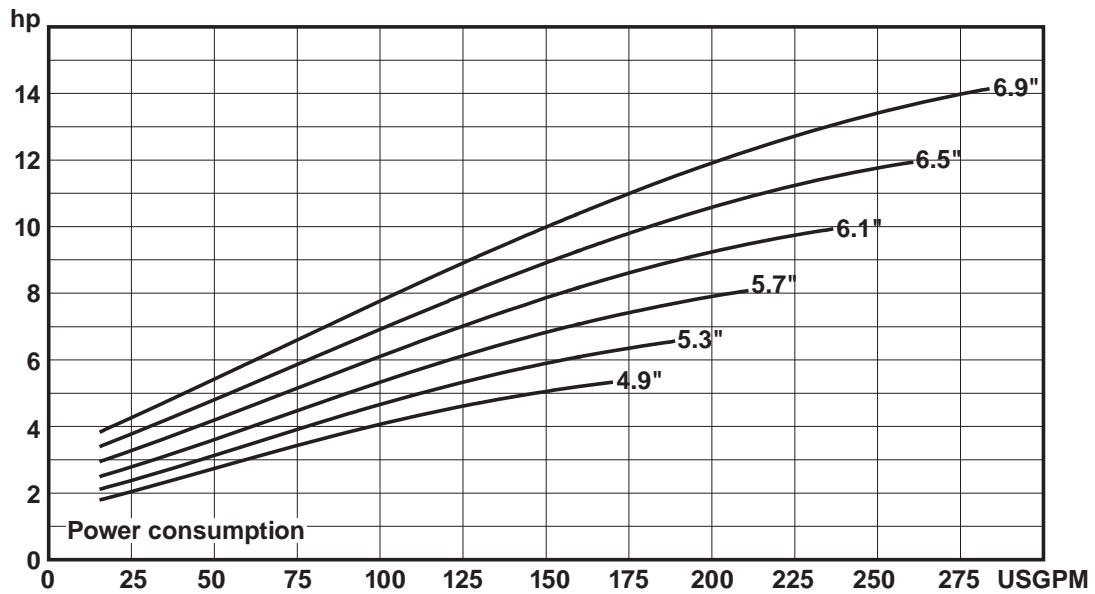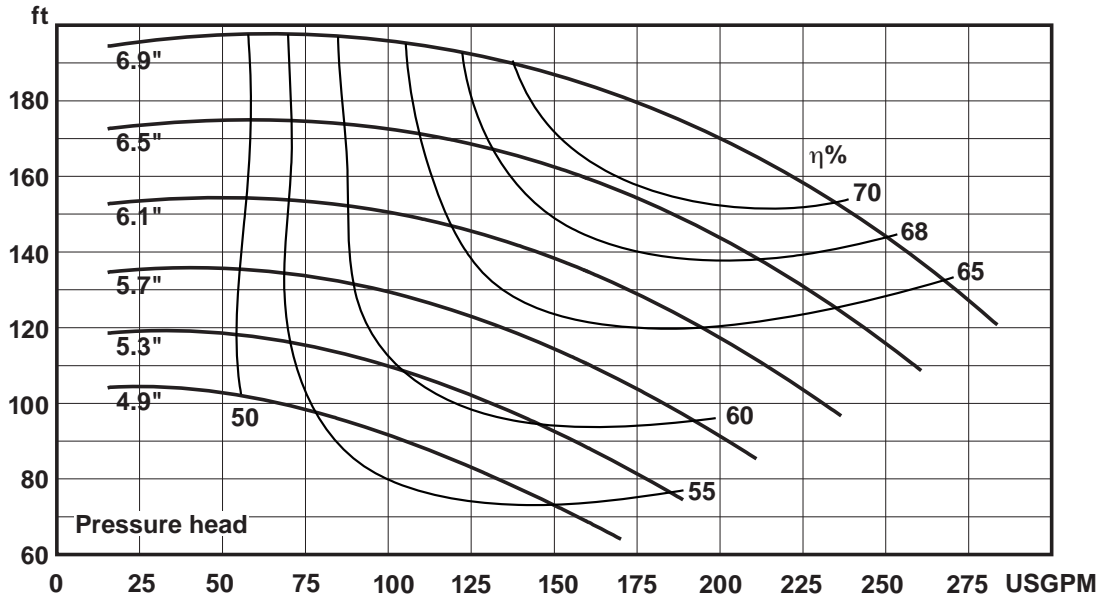

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.235 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+35/55 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2.5" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 7.1"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

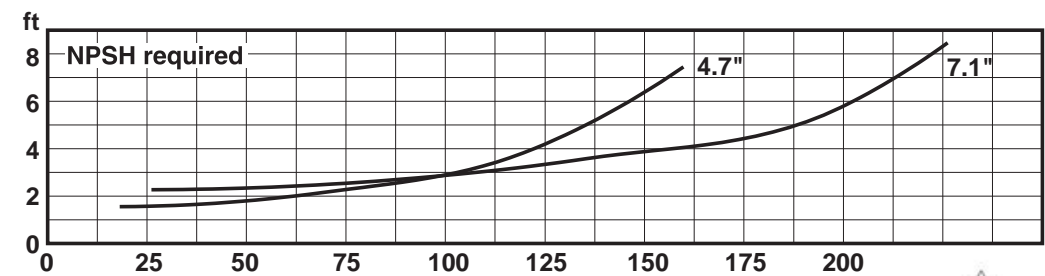
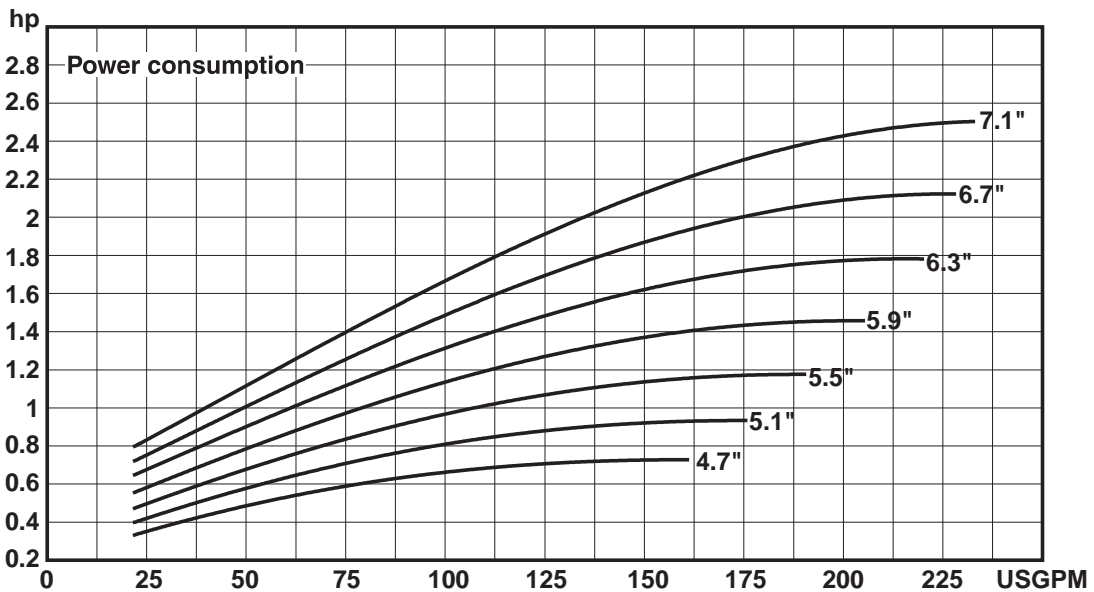
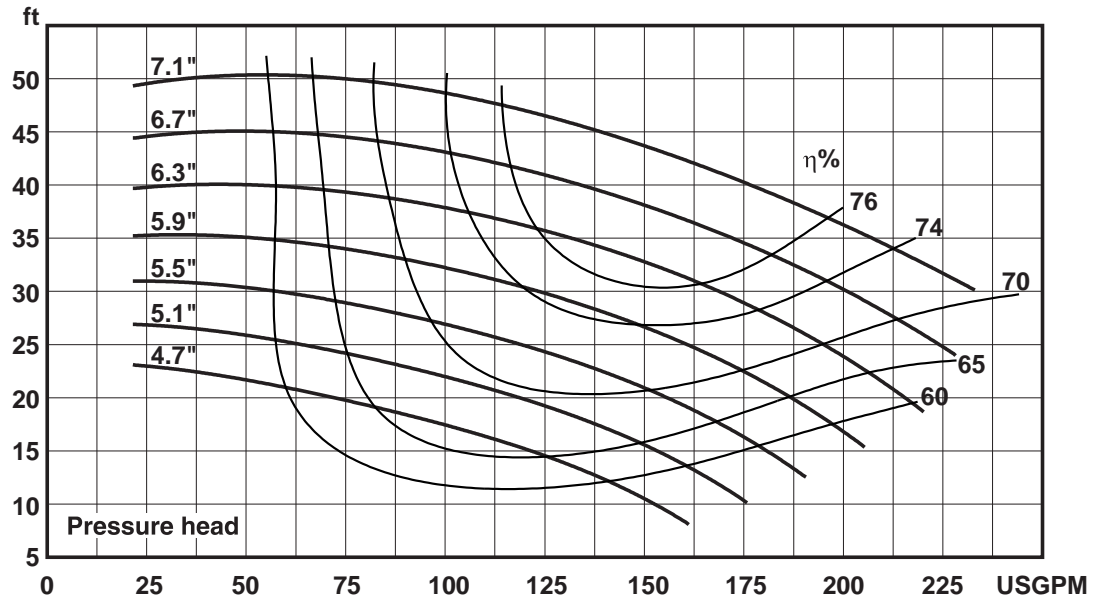




W+ SERIES MODEL W+35/55 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2.5" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 7.1"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

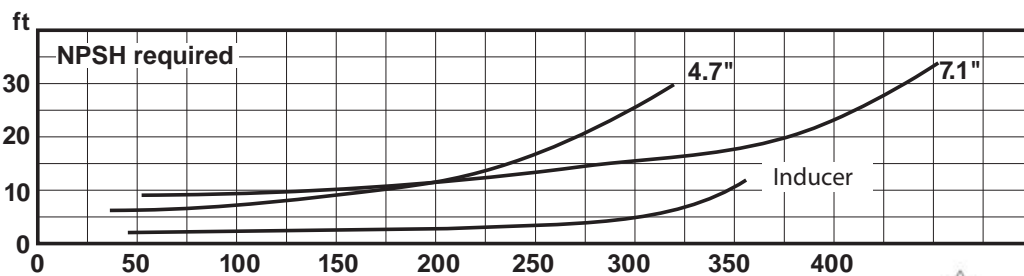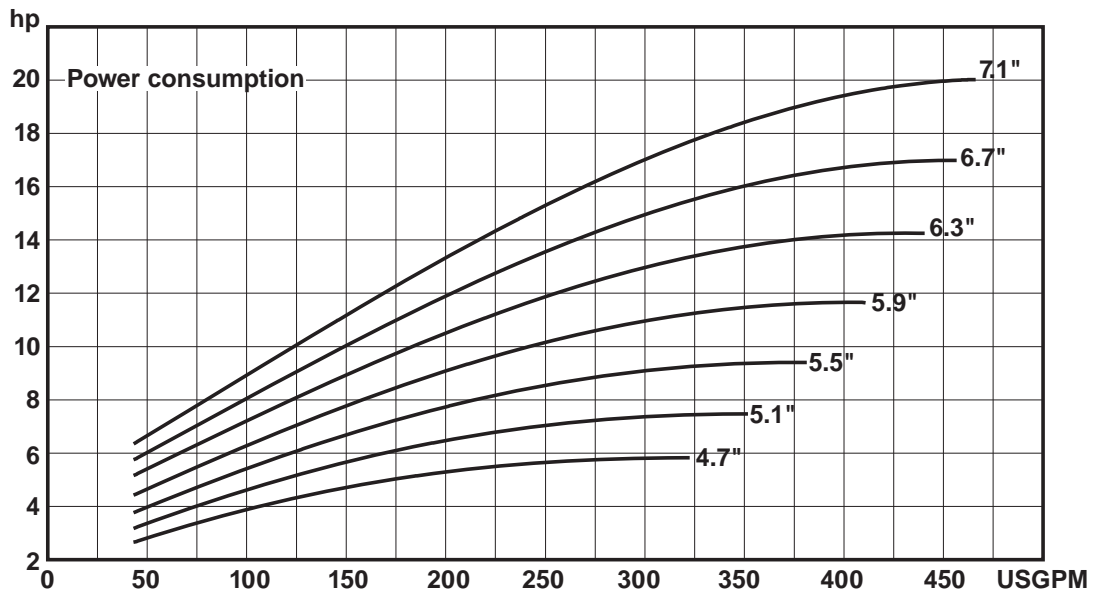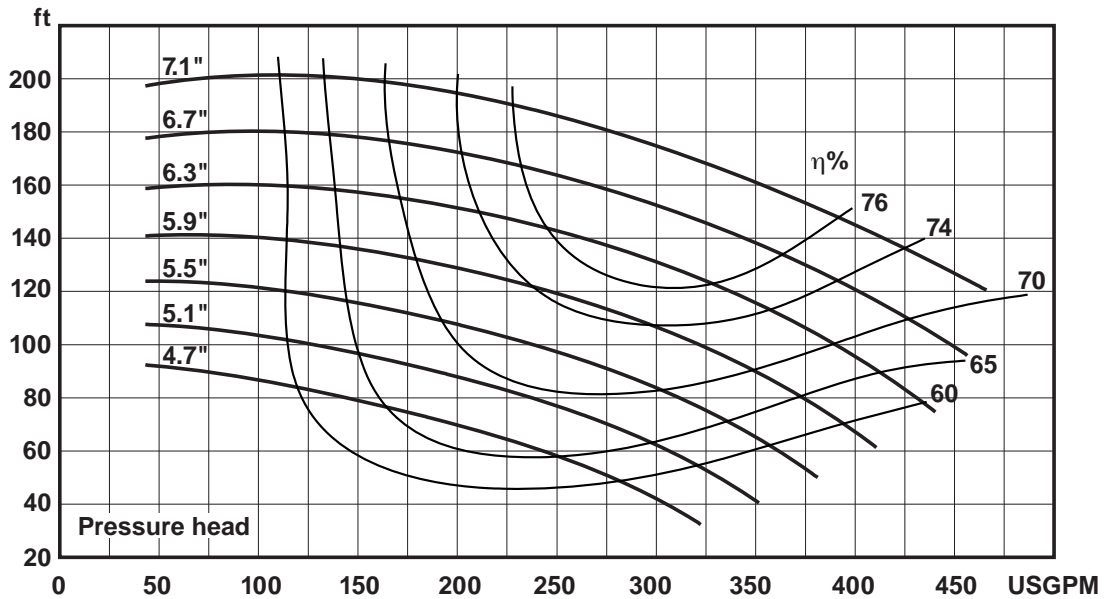

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.240 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+50/8 CENTRIFUGAL PUMP CAPACITY CURVE
1.5" INLET - 1" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 7.9"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

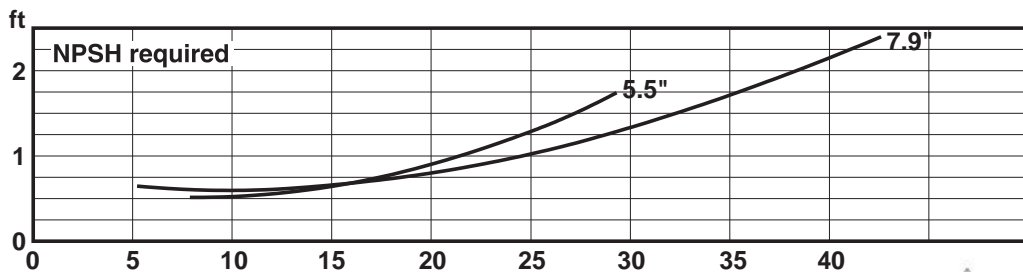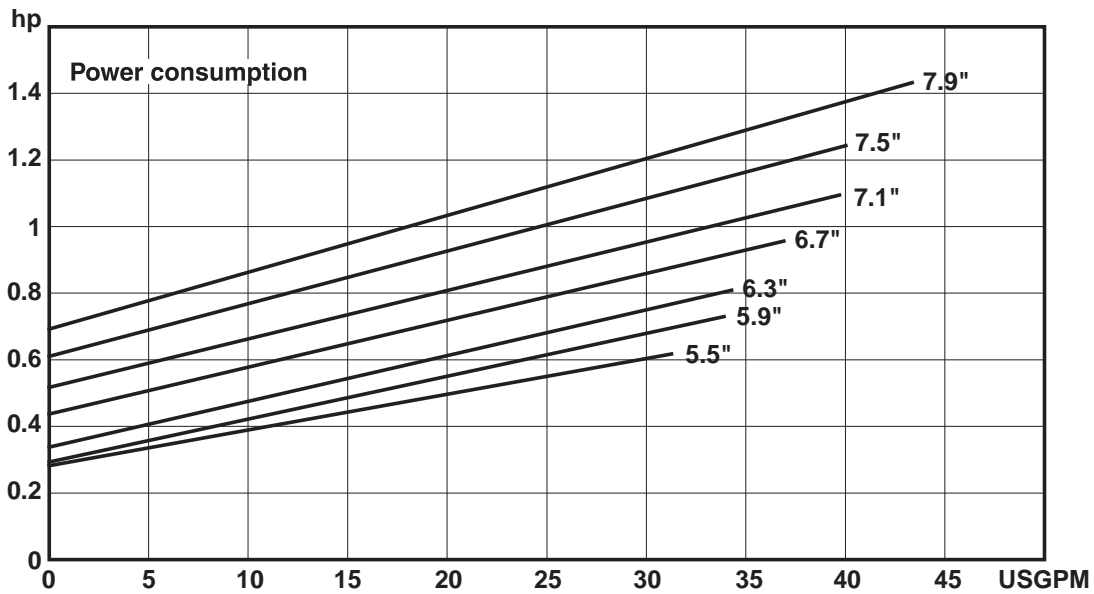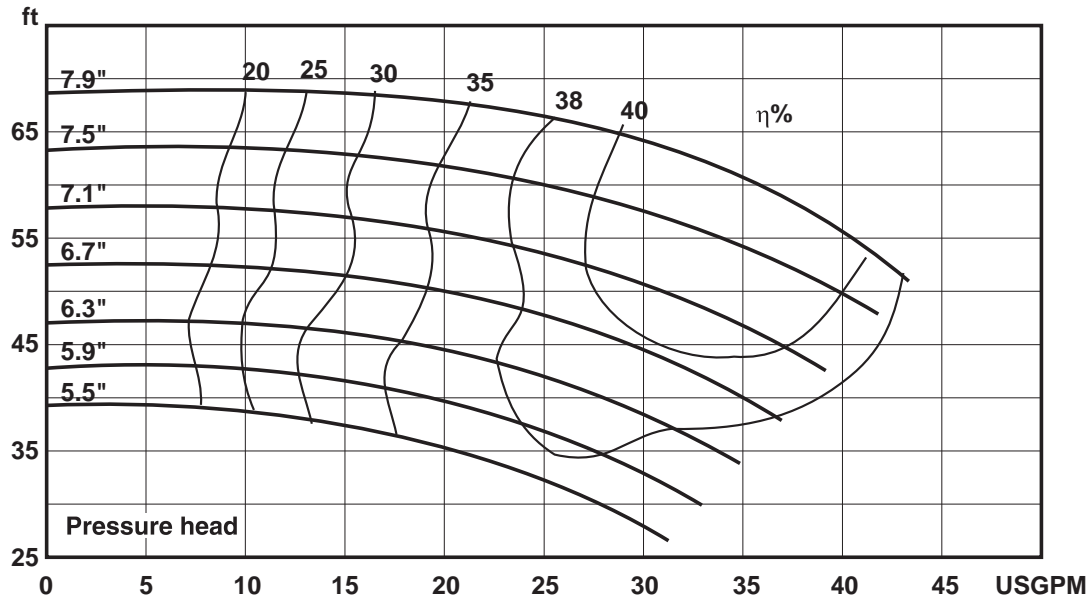

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.240 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+50/8 CENTRIFUGAL PUMP CAPACITY CURVE
1.5" INLET - 1" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 7.9"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

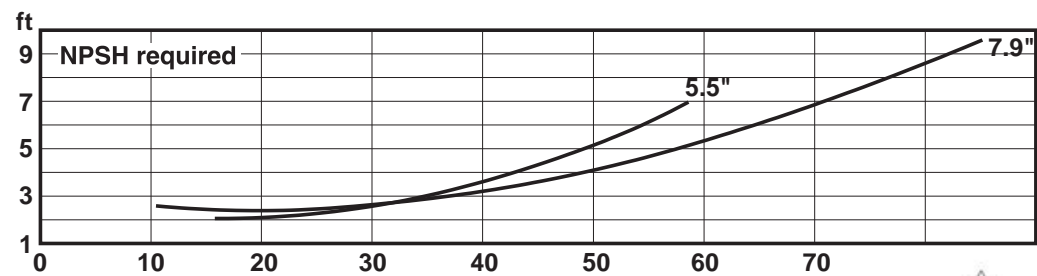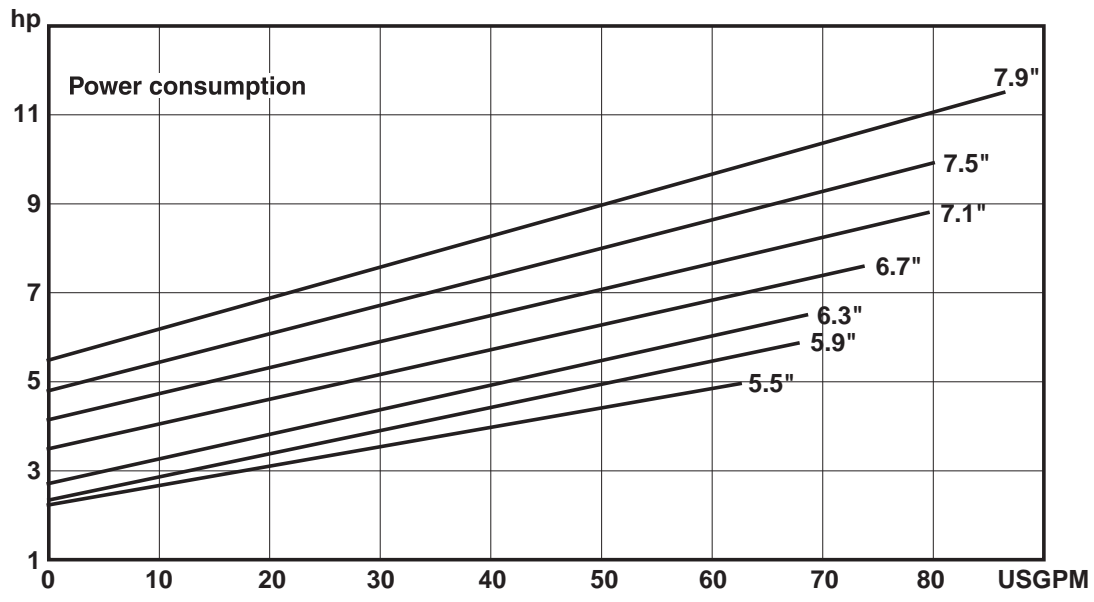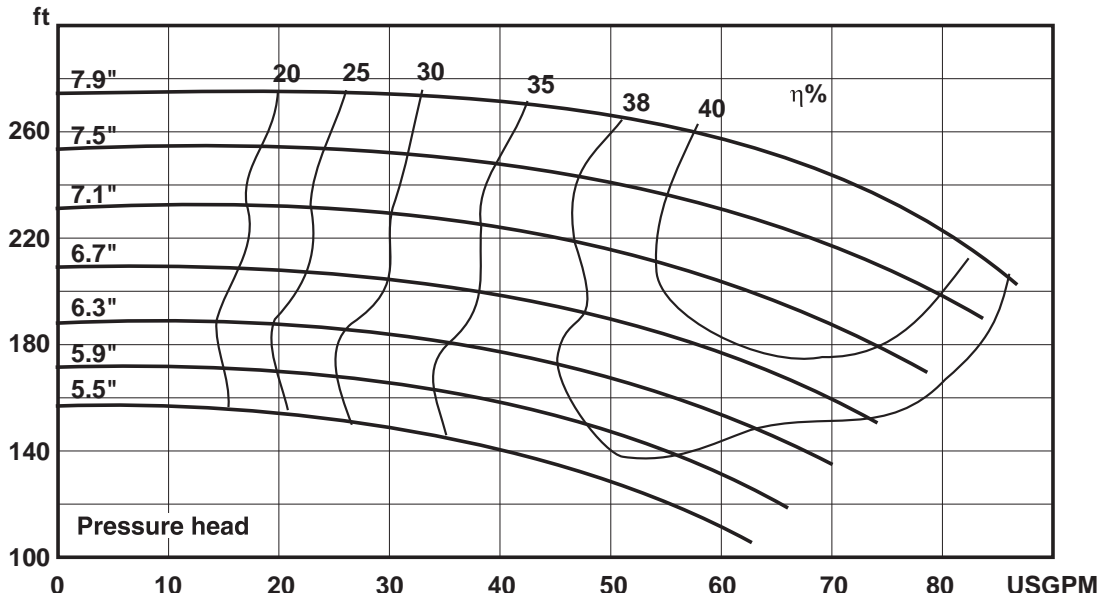

CANCELS
 DATED
 1-11-97






W+SERIES
 A-1-201.245 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+55/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 8.3"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

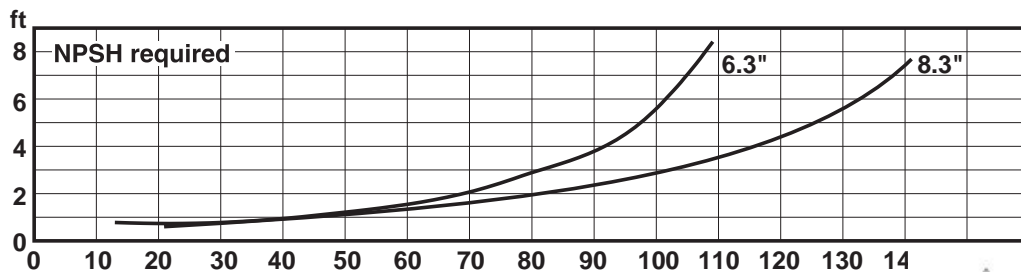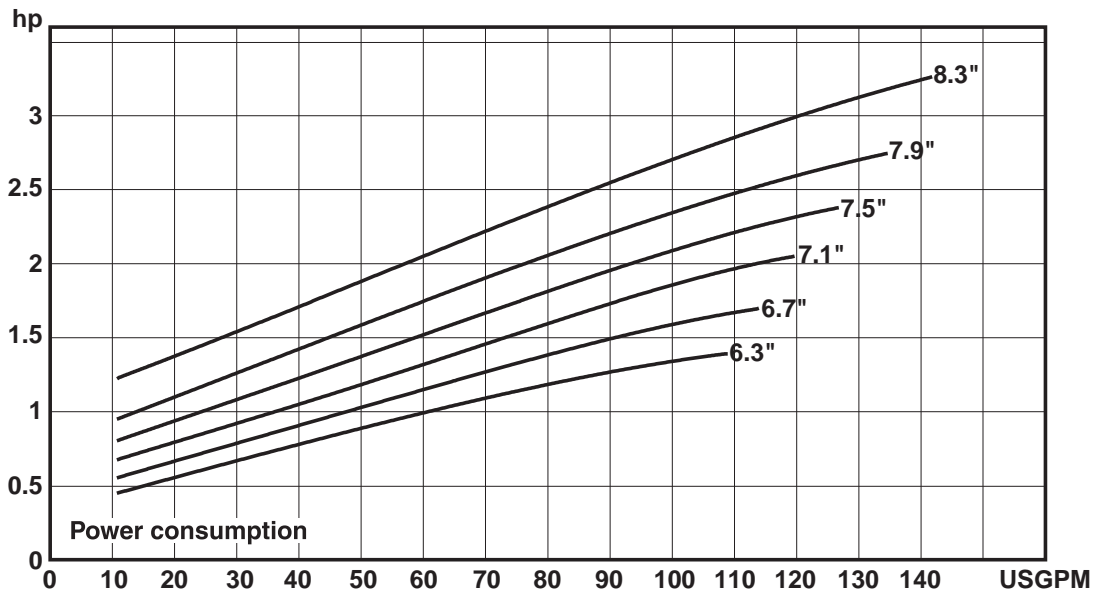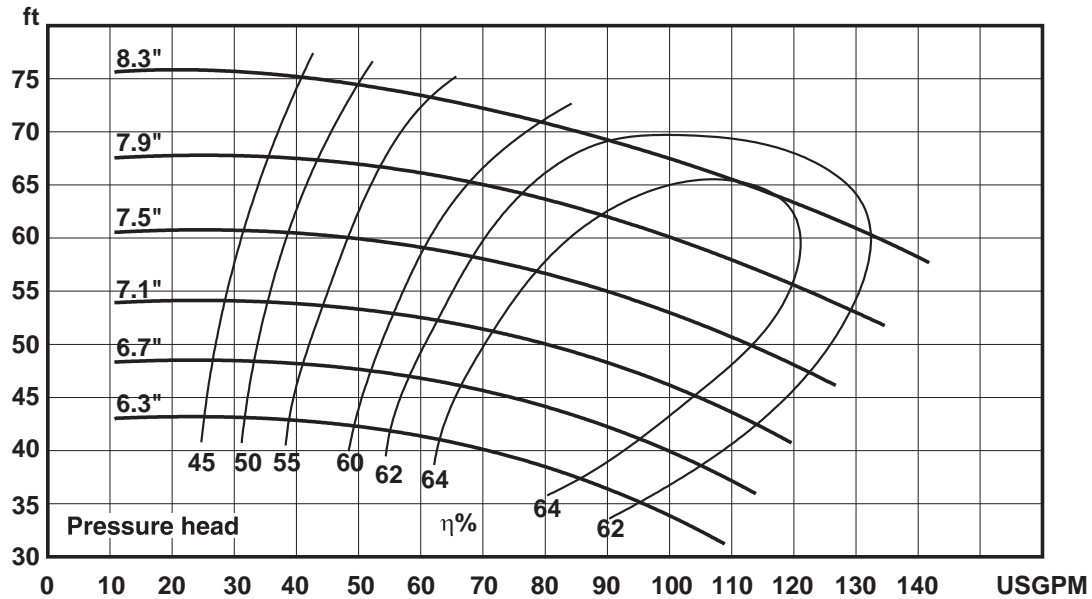




TRIPLEX
 Sales Company



W+ SERIES MODEL W+55/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 8.3"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

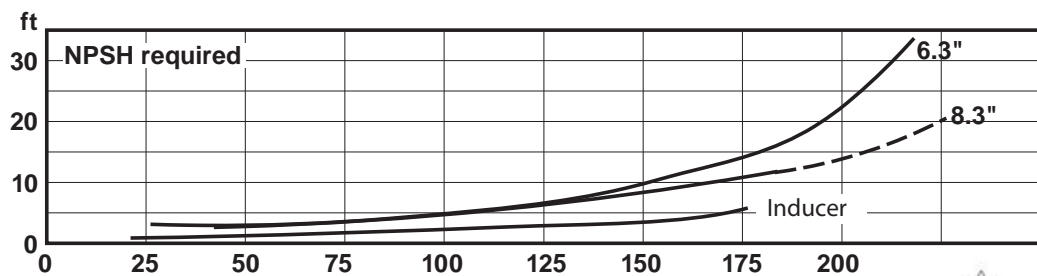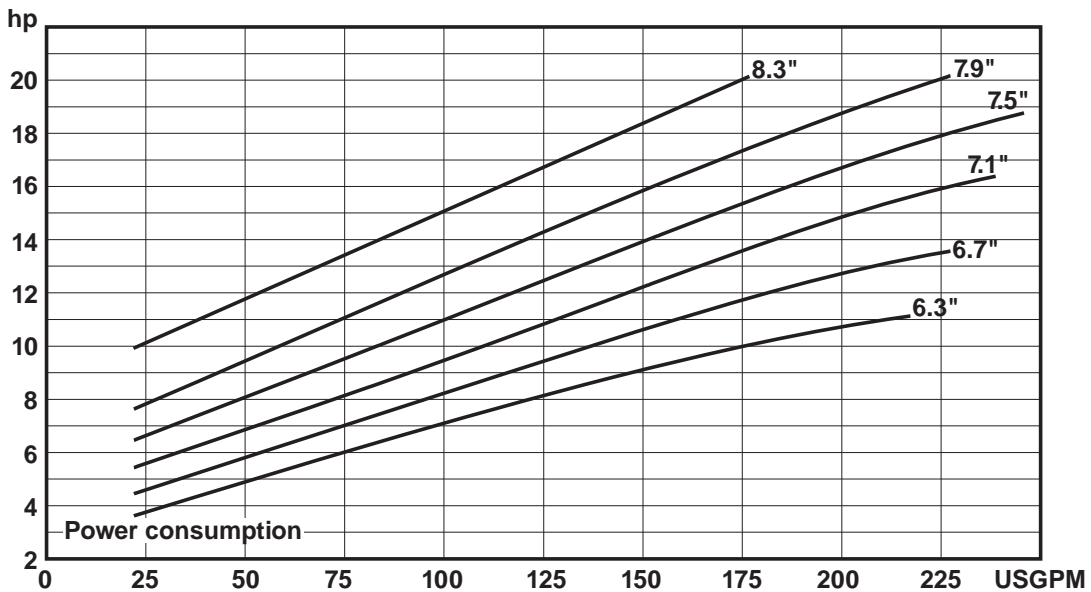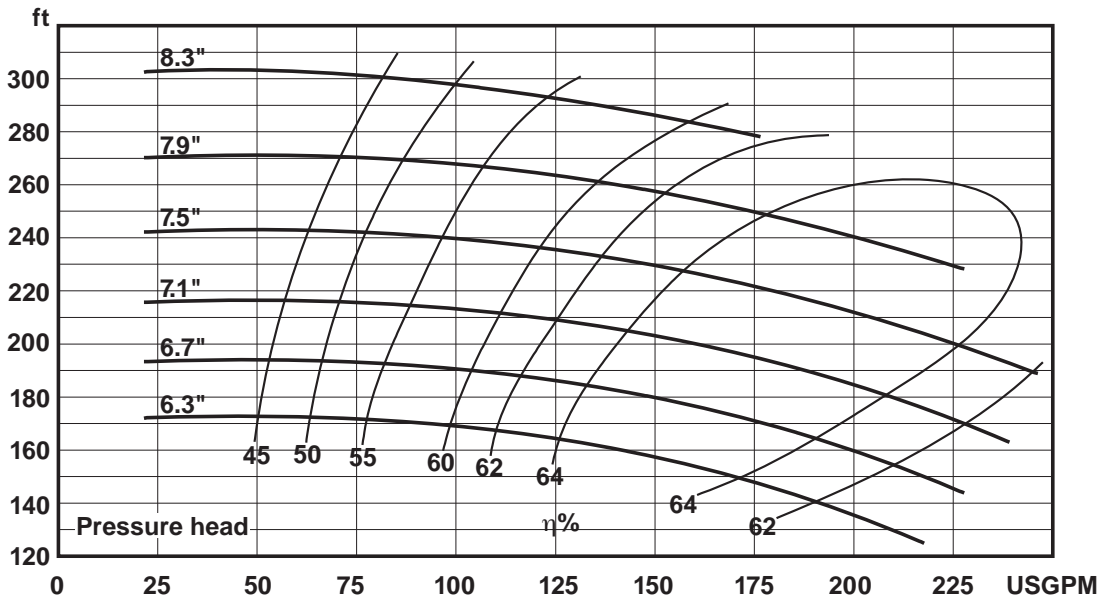

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.250 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+55/60 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 8.7"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

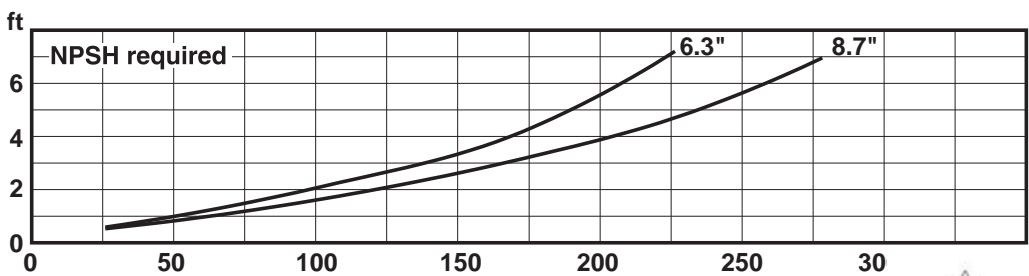
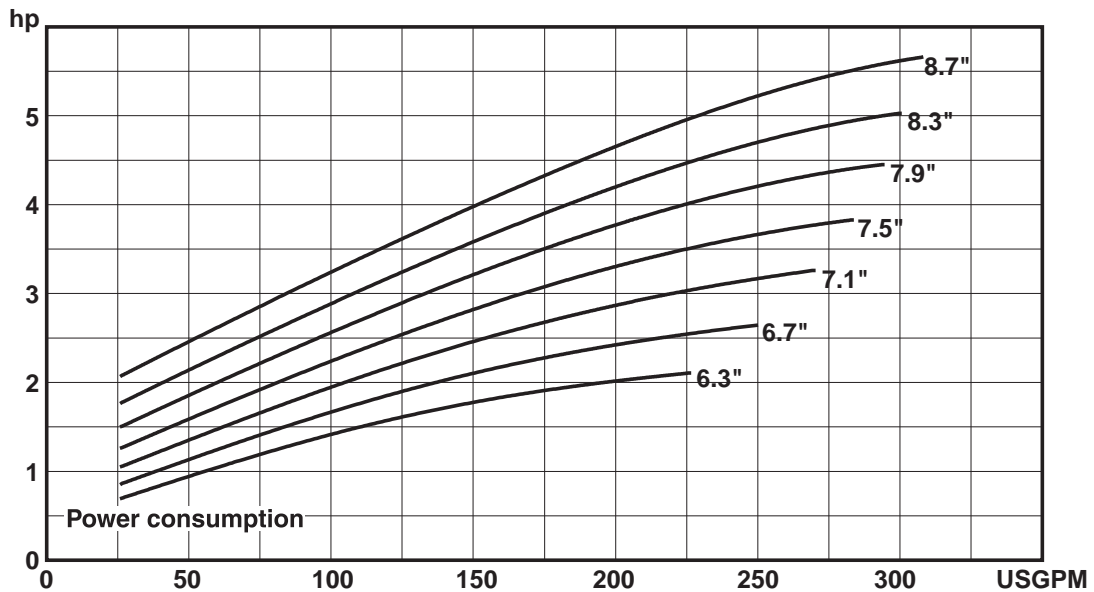
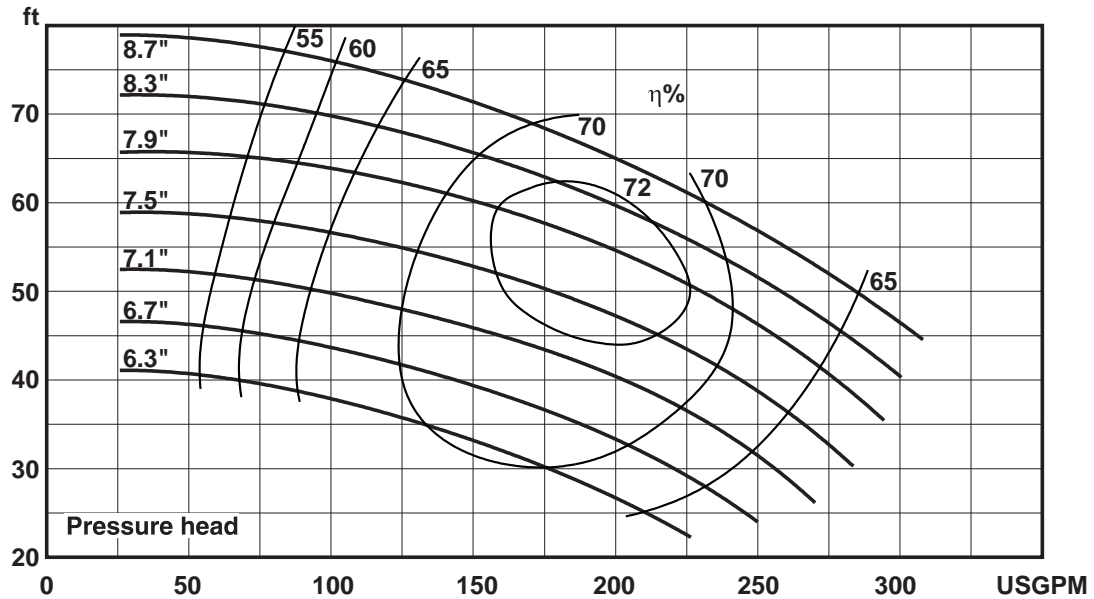




W+ SERIES MODEL W+55/60 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 8.7"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

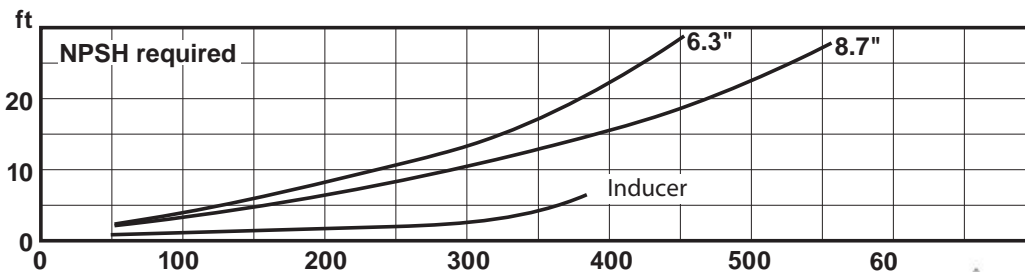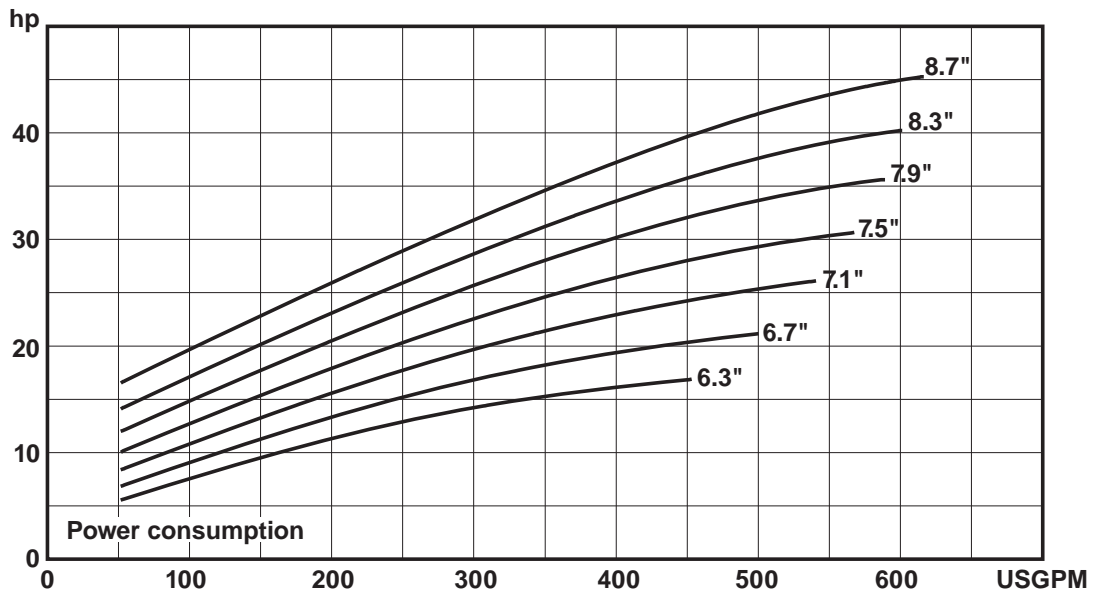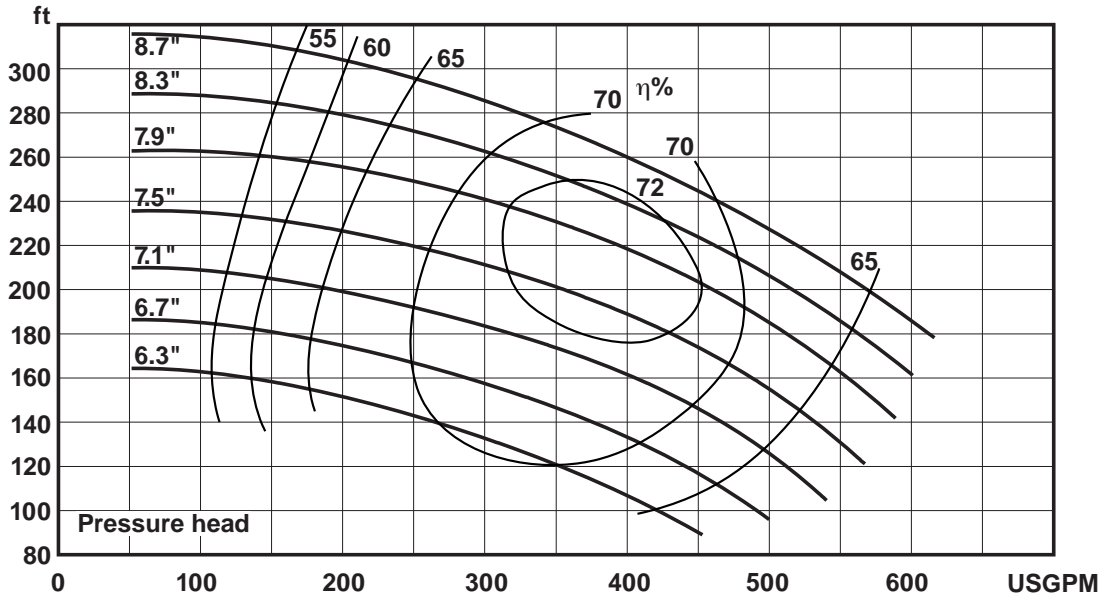

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.255 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+60/110 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 9.1"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

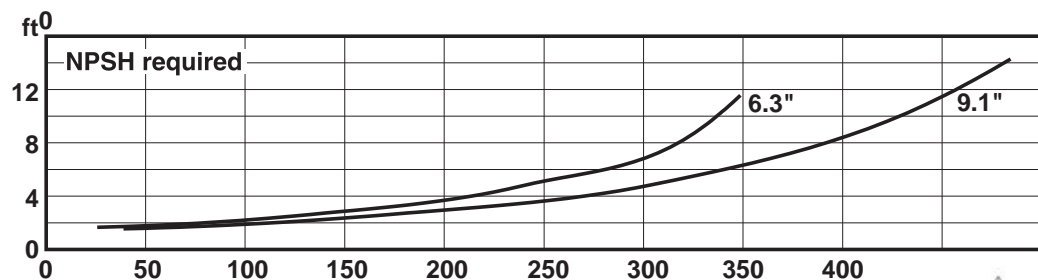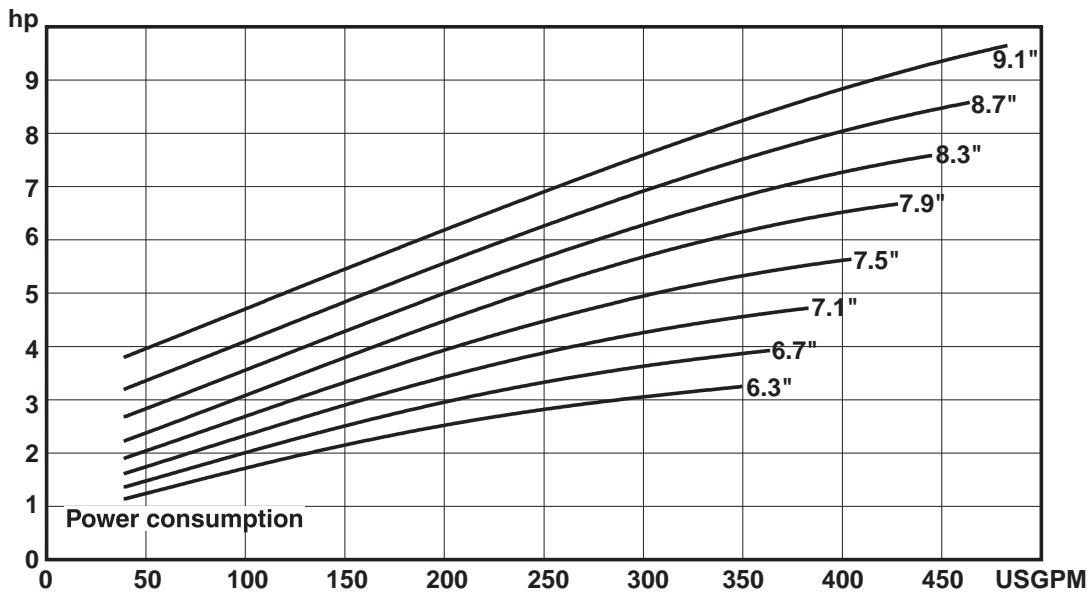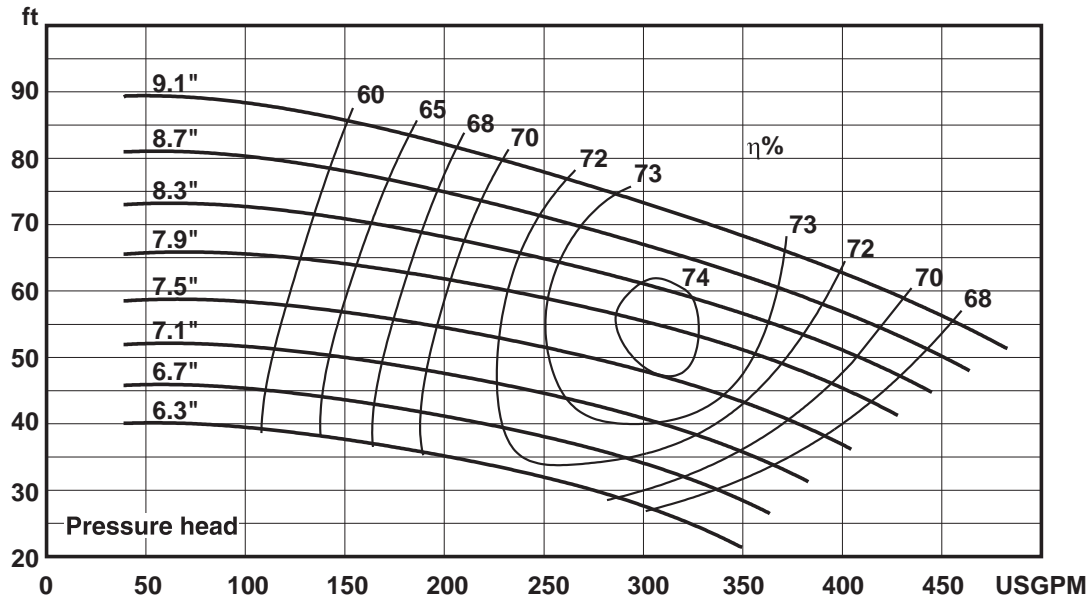

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.255 ISS T

EFFECTIVE 26-04-2010

W+ SERIES MODEL W+60/110 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 9.1"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

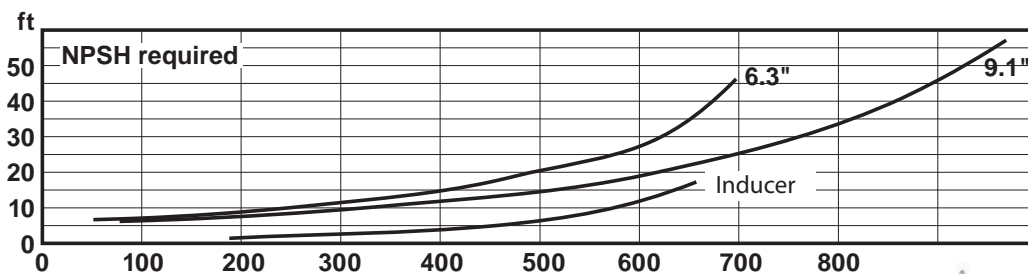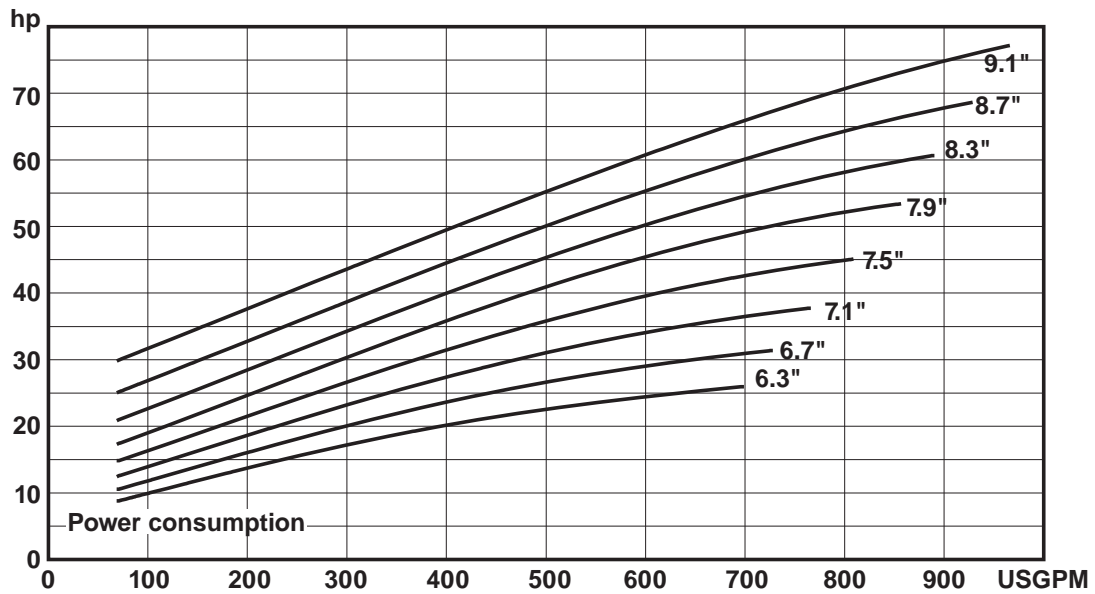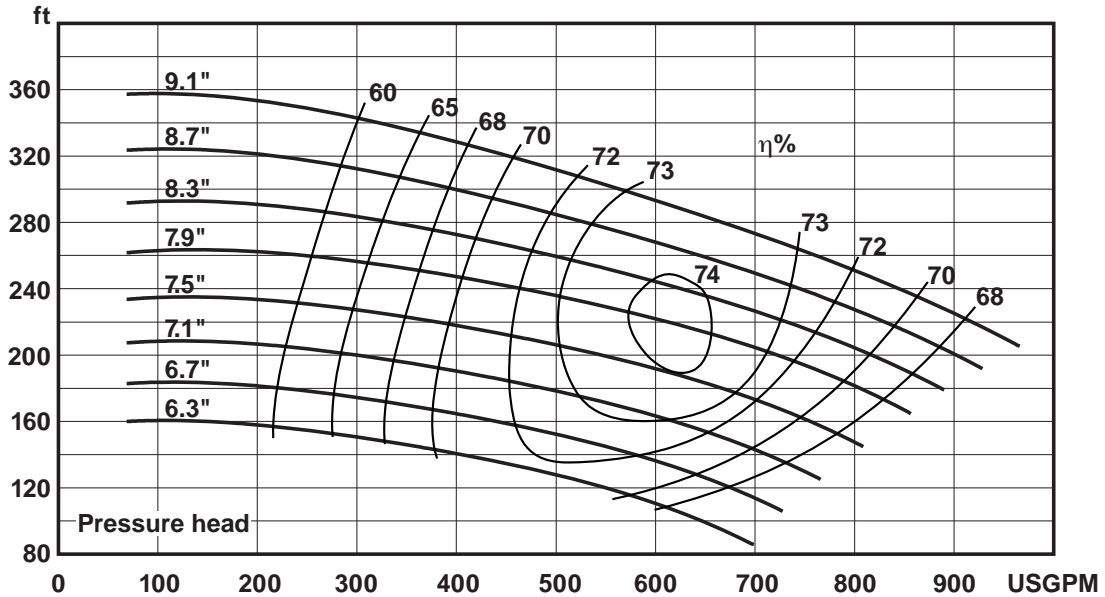

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.260 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+65/350 CENTRIFUGAL PUMP CAPACITY CURVE
6" INLET - 4" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 10.2"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

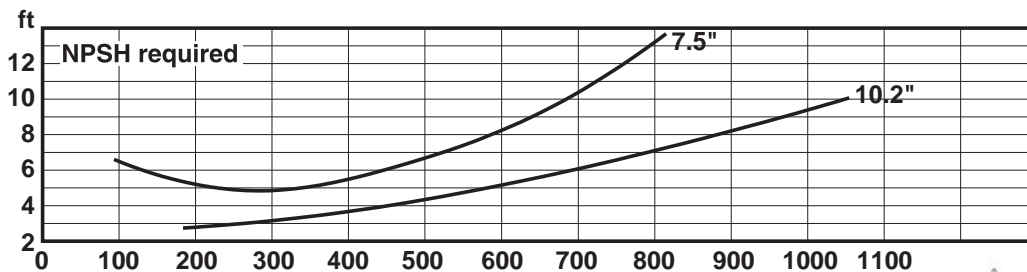
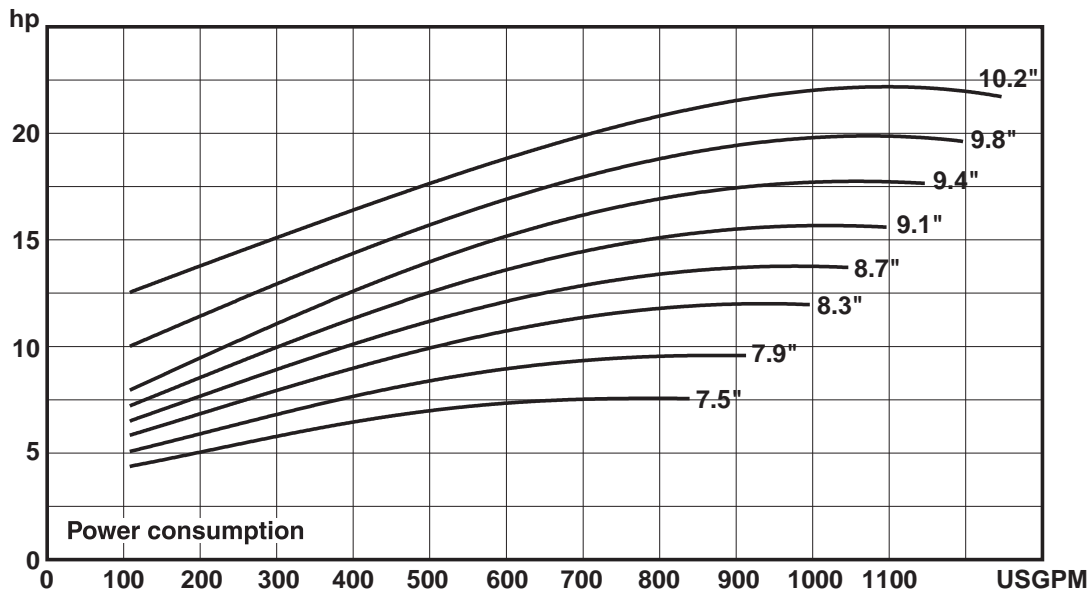
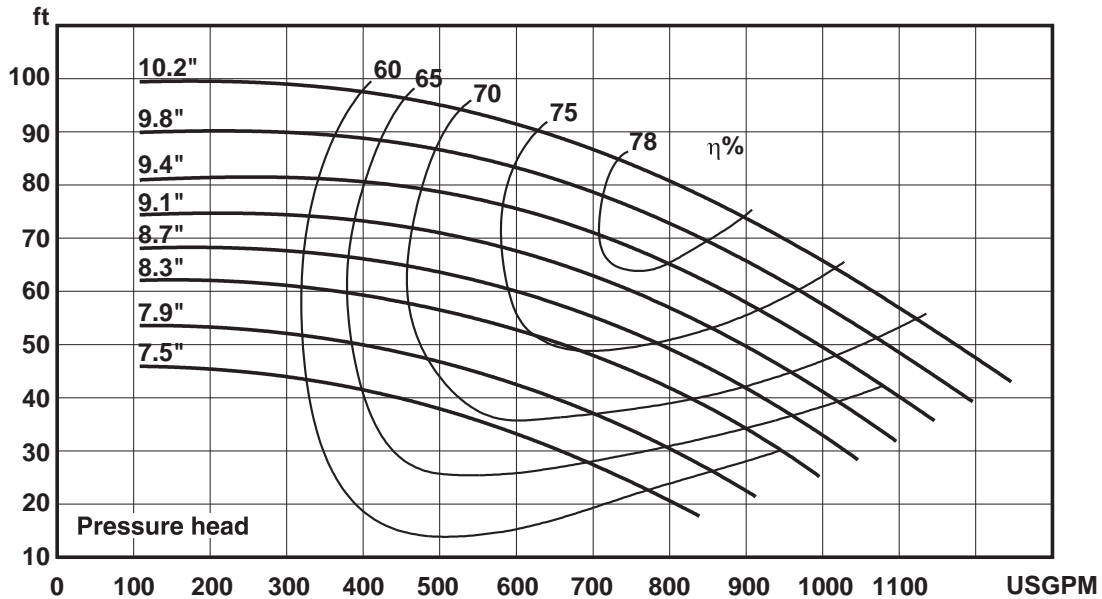




W+ SERIES MODEL W+65/350 CENTRIFUGAL PUMP CAPACITY CURVE
6" INLET - 4" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 9.8"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

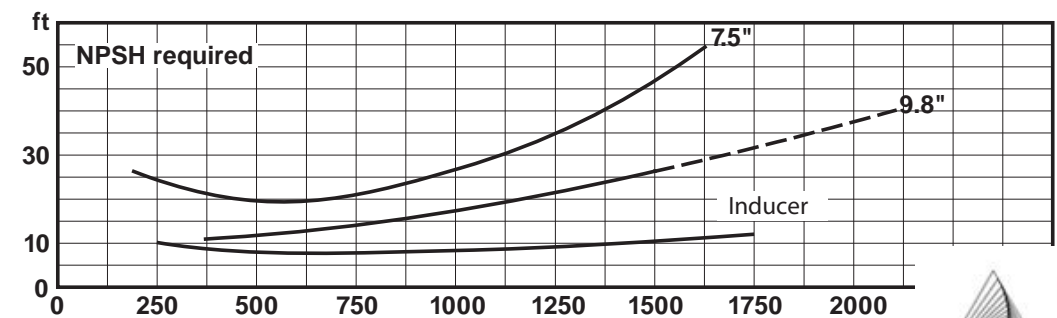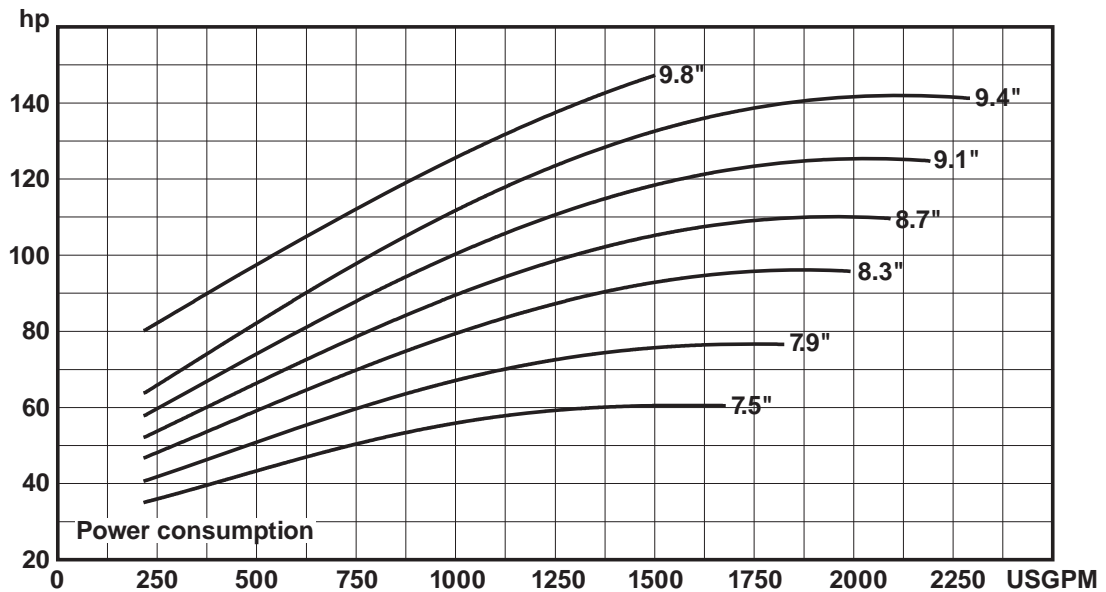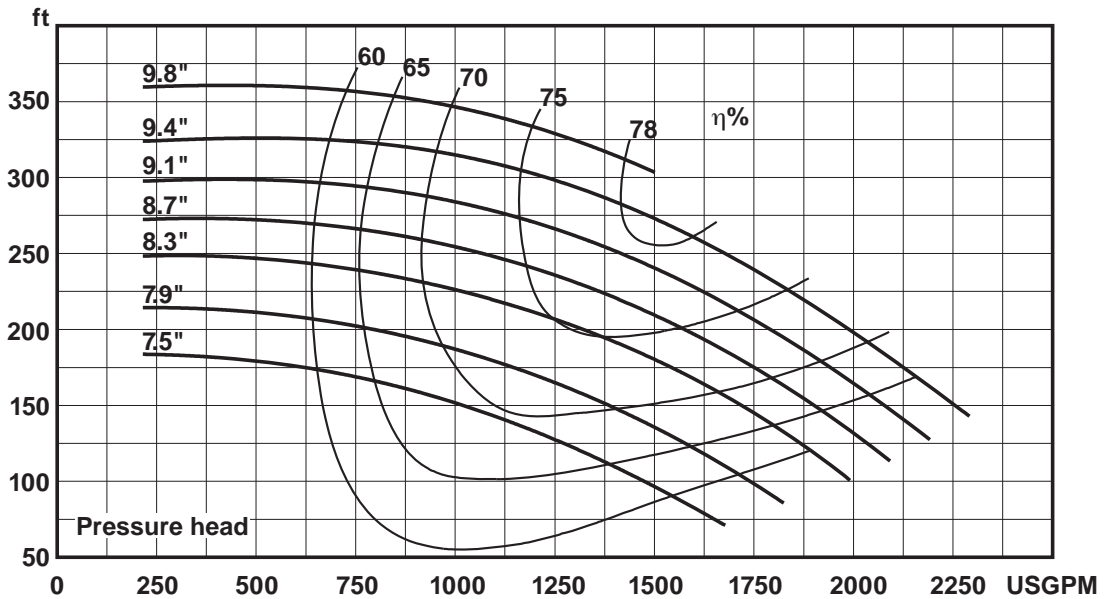

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.265 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+70/40 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 9.4"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

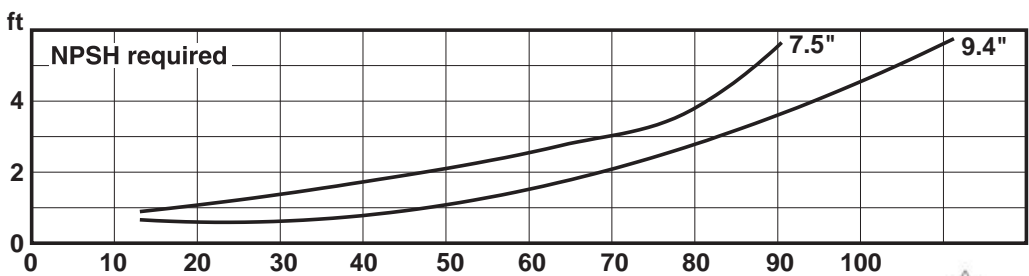
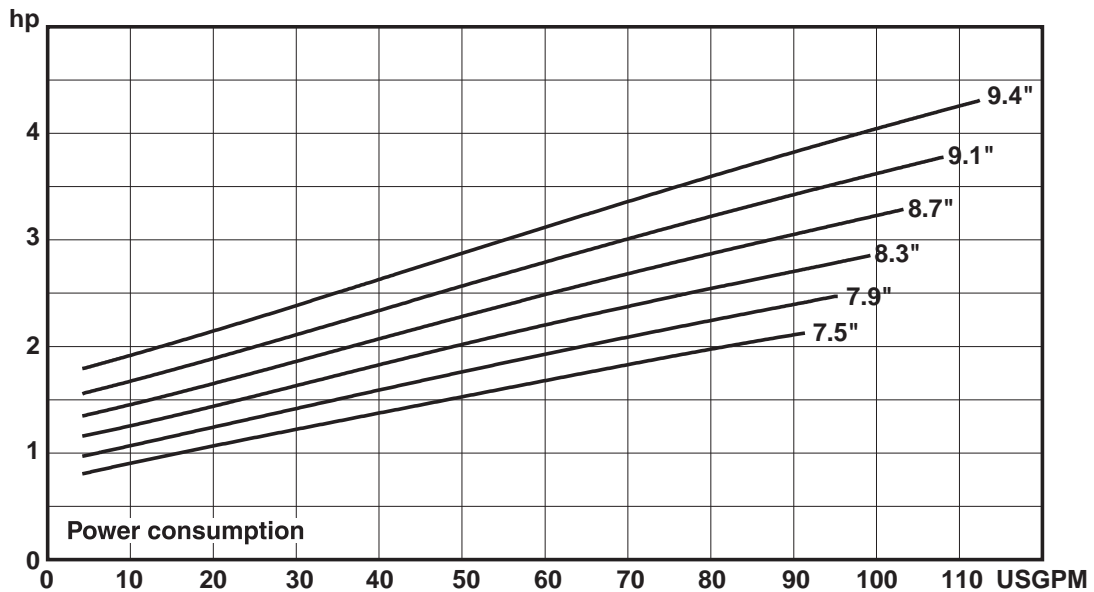
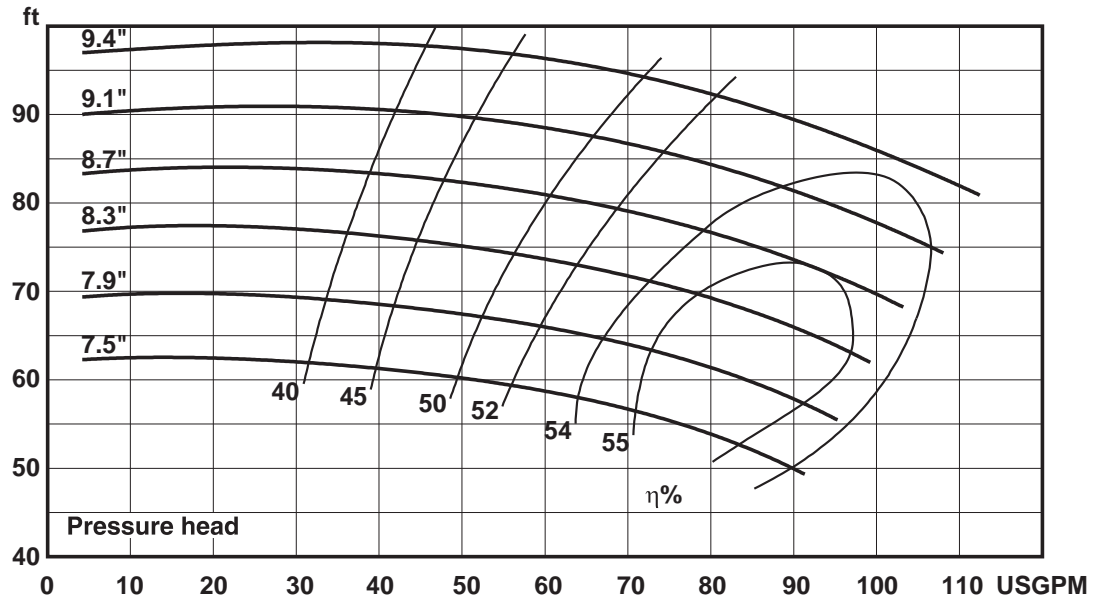




W+ SERIES MODEL W+70/40 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 9.4"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

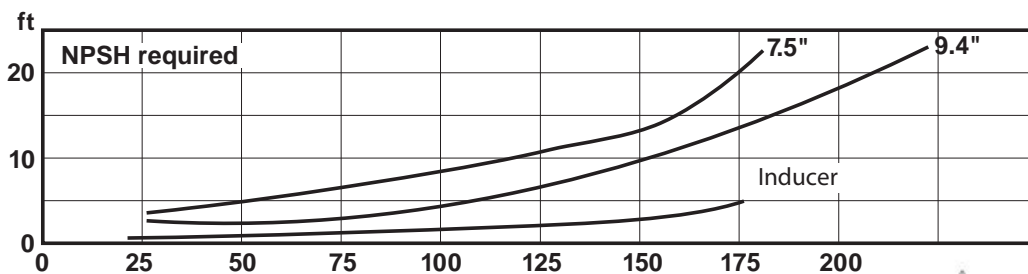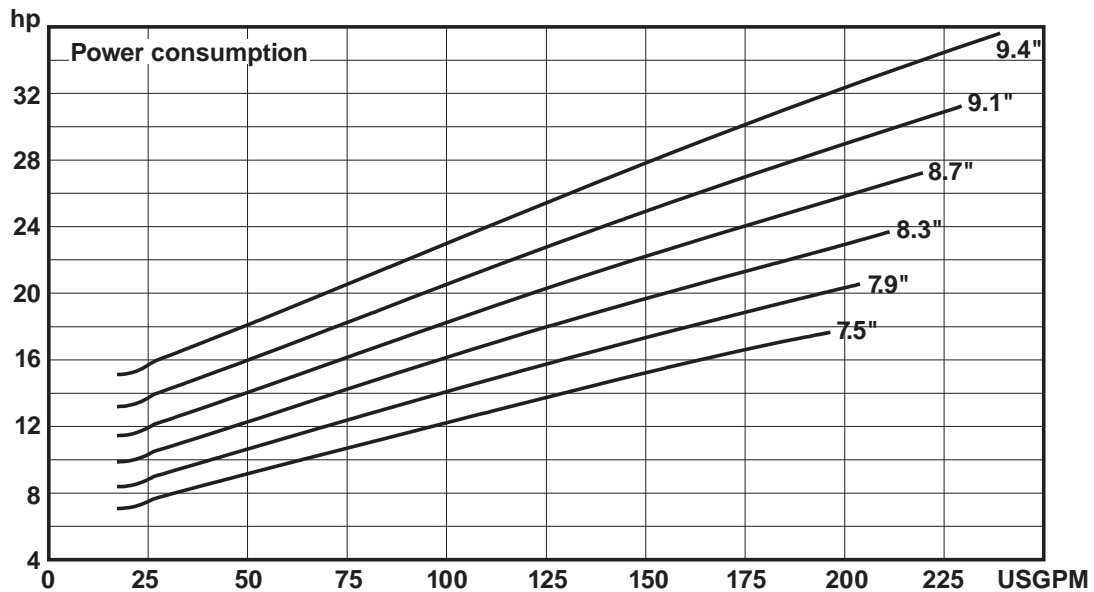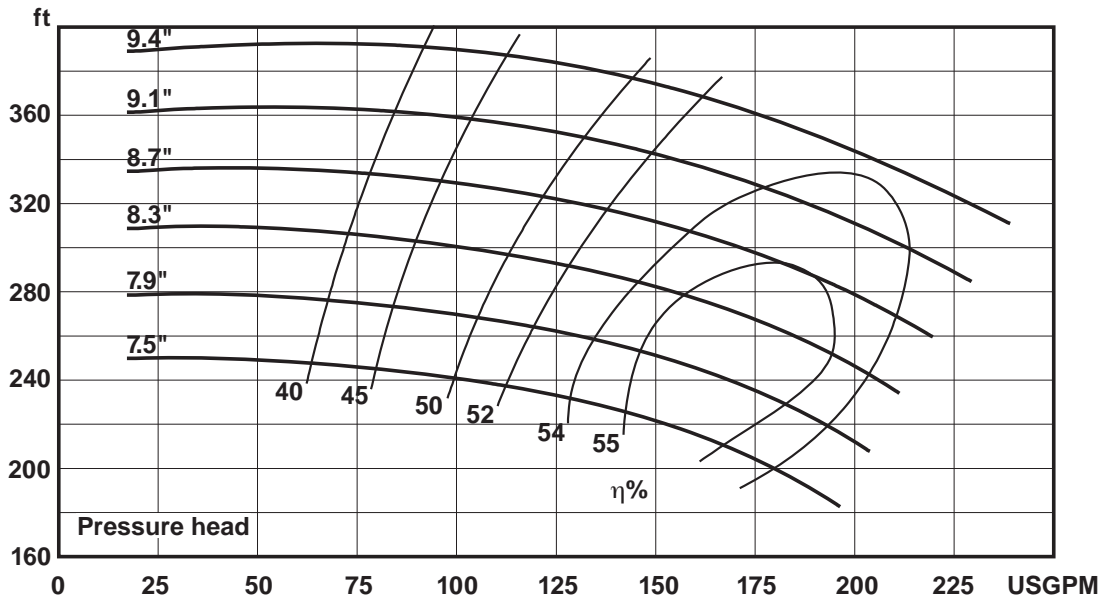

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.270 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+80/80 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 10.0"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

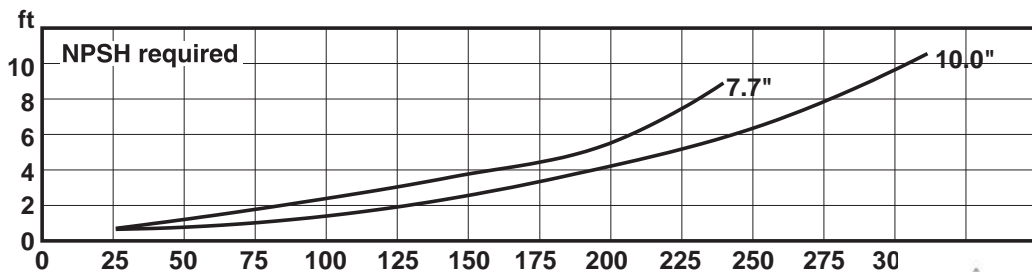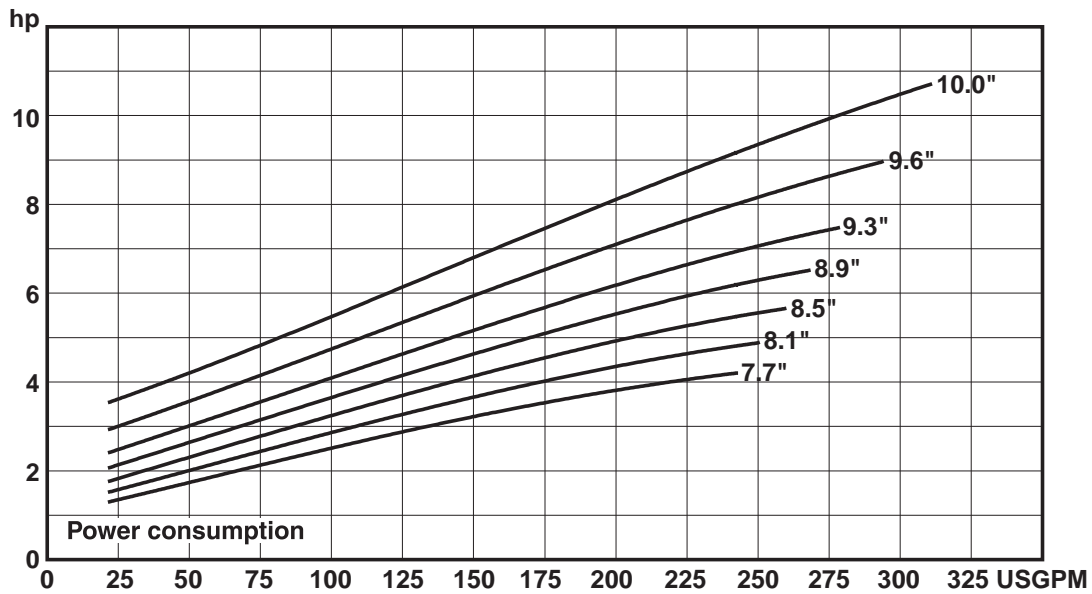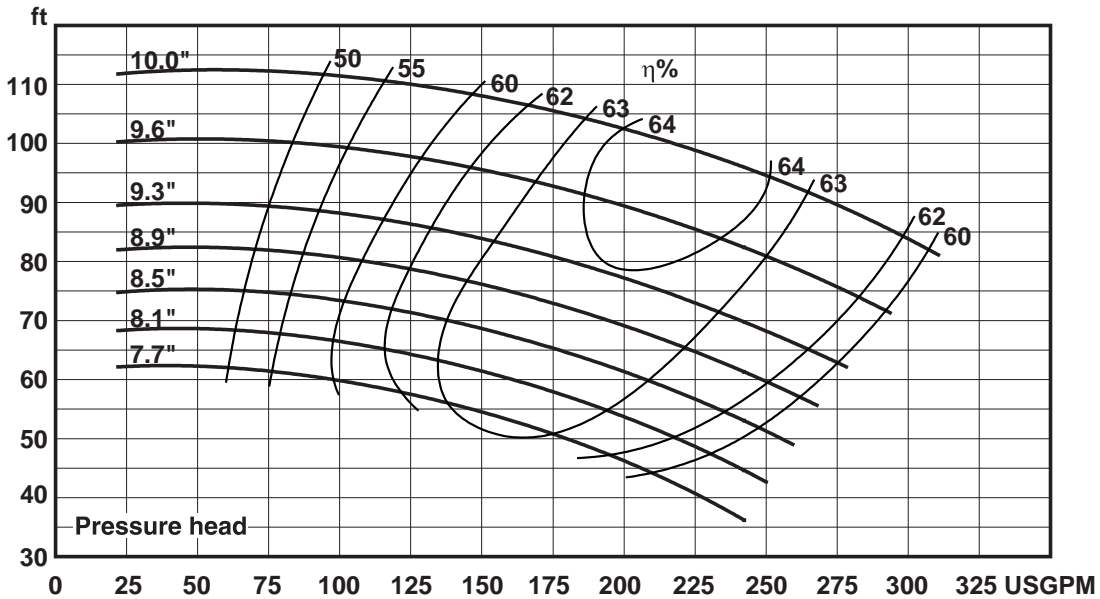




TRIPLEX
 Sales Company



W+ SERIES MODEL W+80/80 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 10.0"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

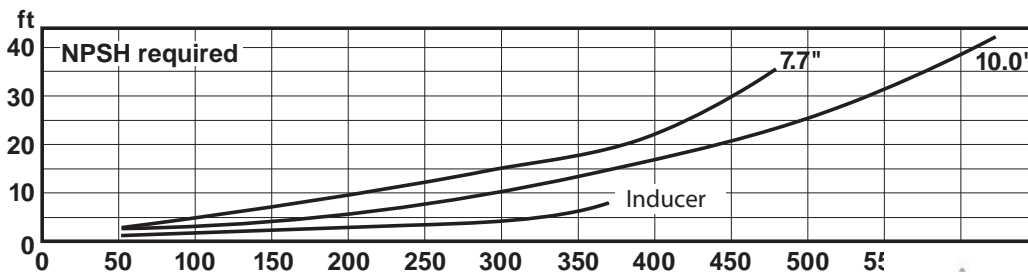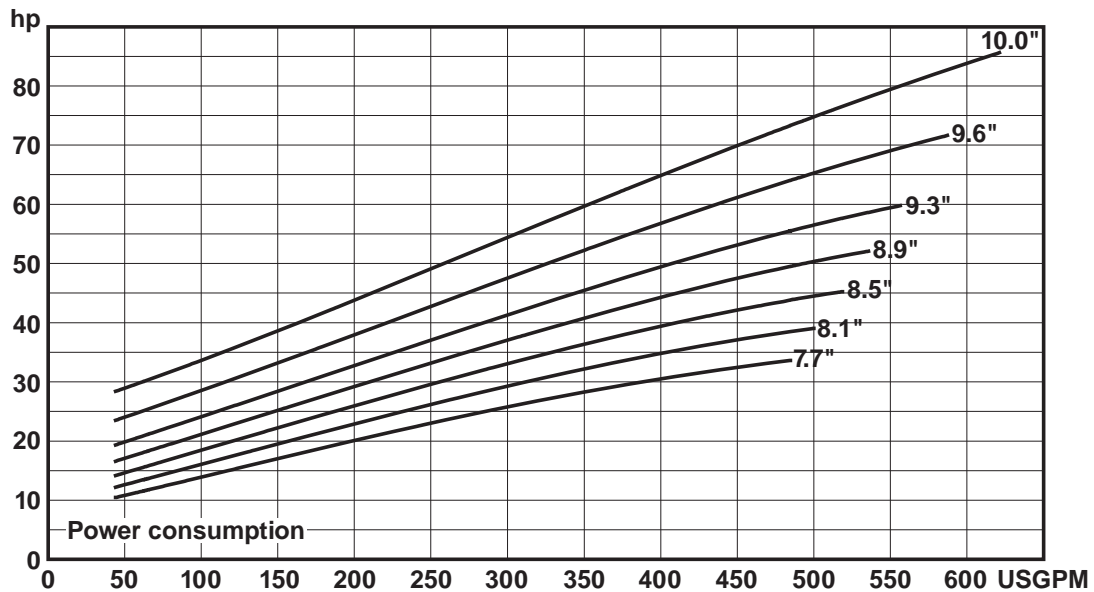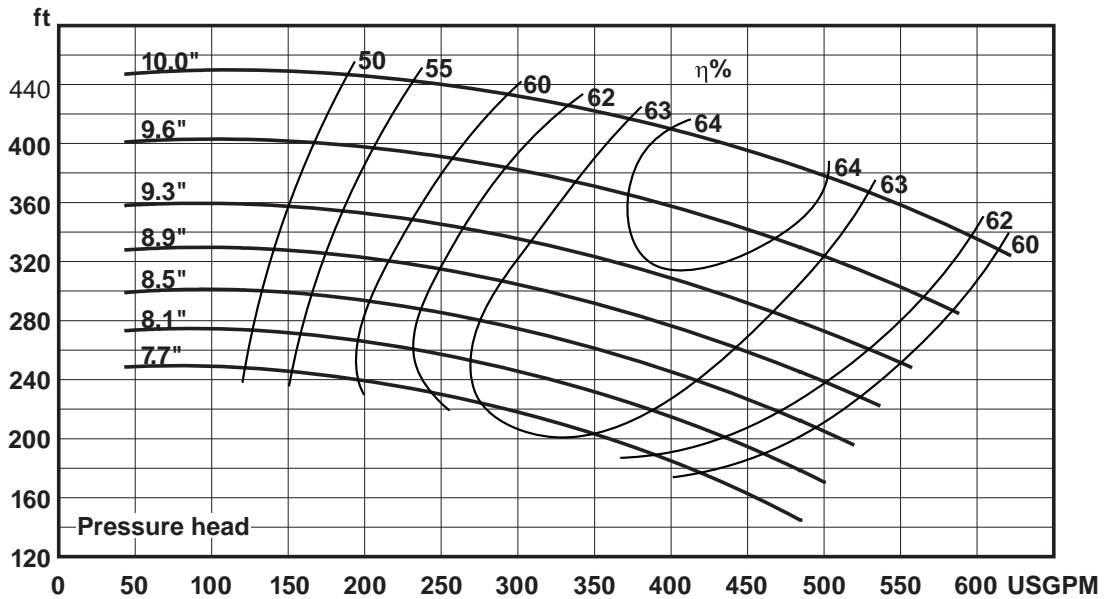

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.275 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+110/130 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 11.4"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

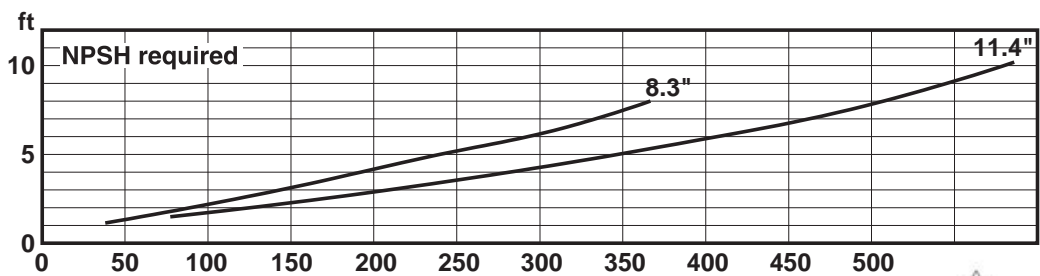
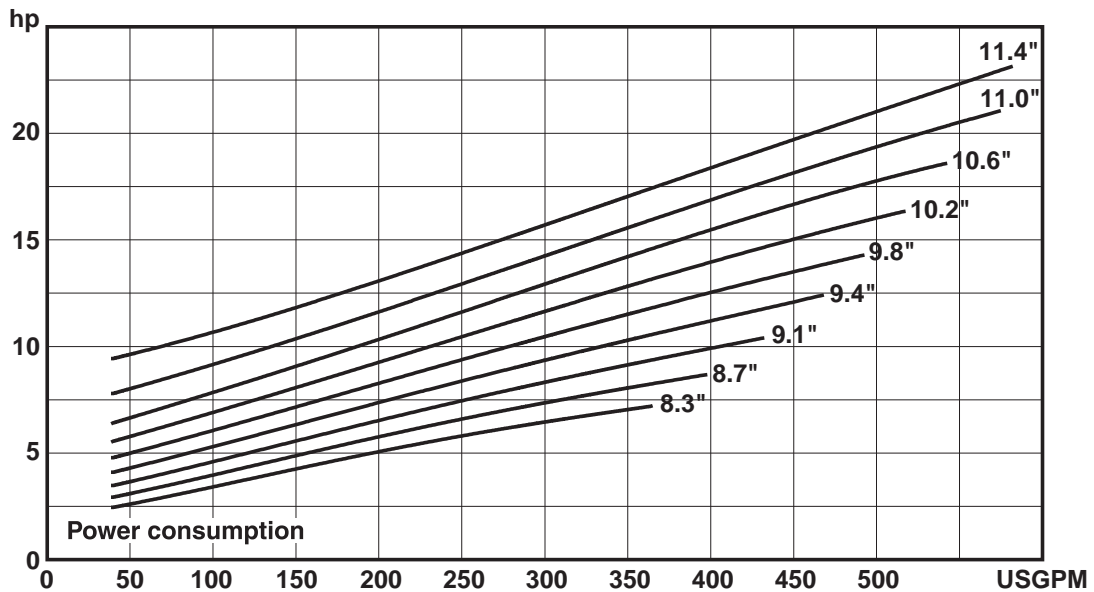
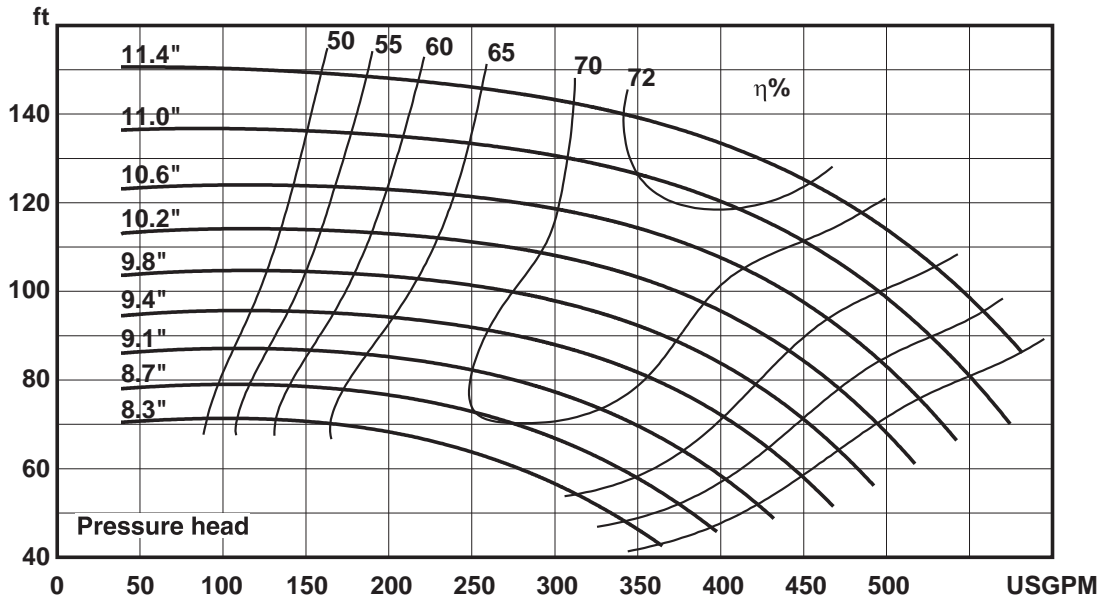




W+ SERIES MODEL W+110/130 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 11.4"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

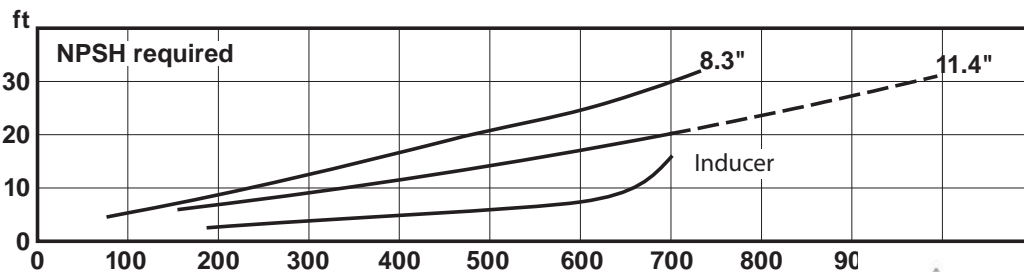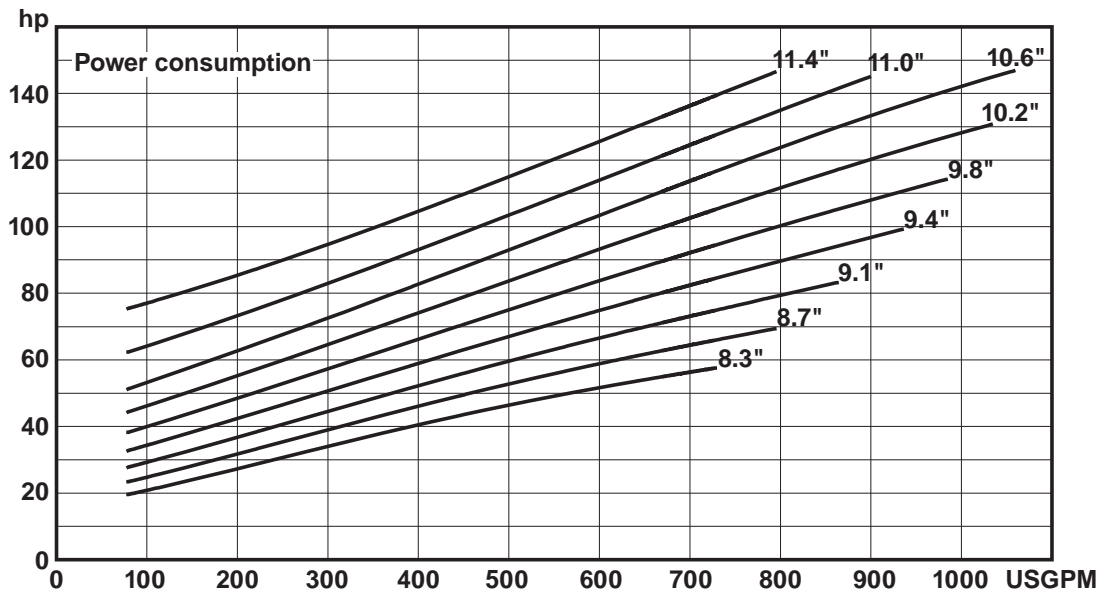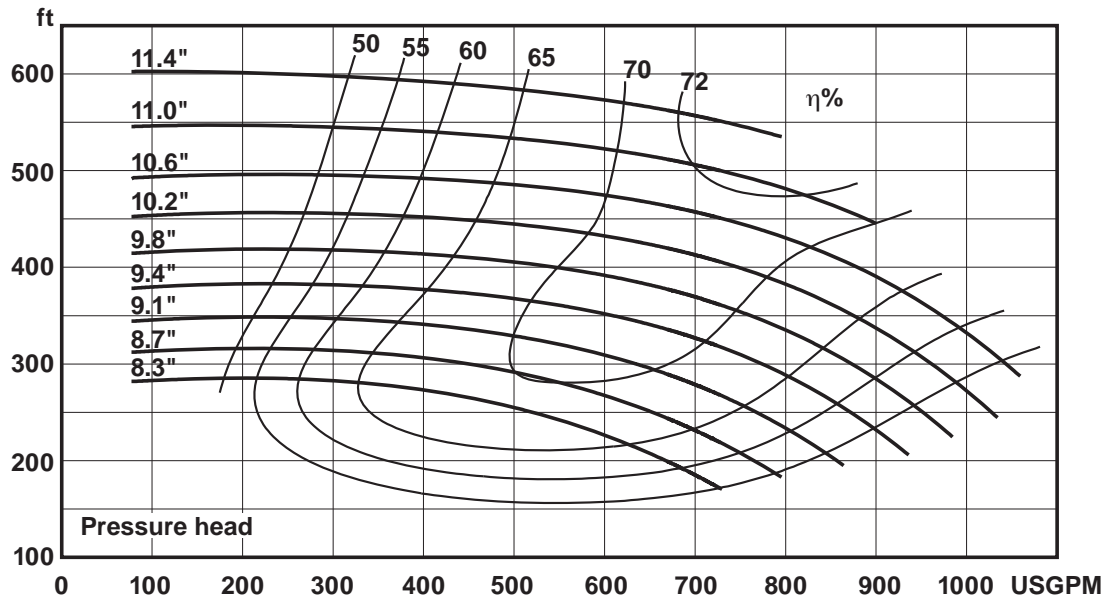

CANCELS
 DATED
 1-1-97




W+SERIES
 A-1-201.280 ISS S

EFFECTIVE 1-11-08

**W+ SERIES MODEL W+140/50 2-STAGES CENTRIFUGAL PUMP CAPACITY CURVE
 3" INLET - 2" OUTLET, 3500 RPM, 60 Hz**

NOTE: _____

Impeller dia: Max: 7.9"
 Performance data refer to water at 68°F
 Permissible tolerance $\pm 5\%$

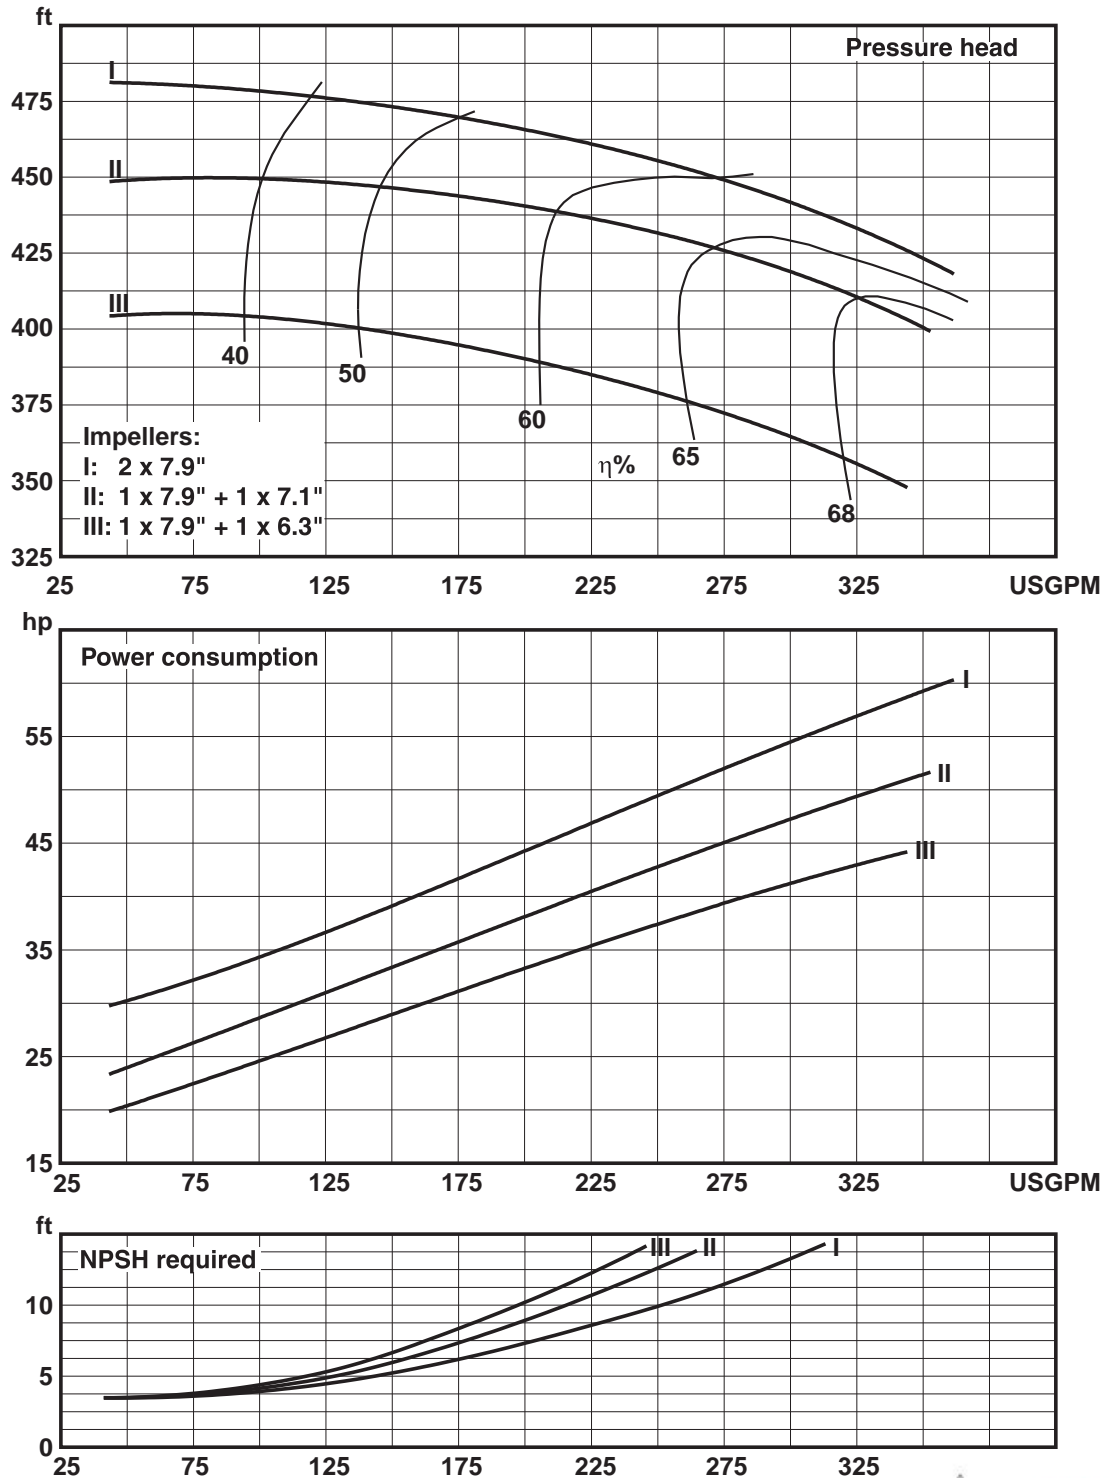

CANCELS
 DATED
 1-1-97






W+SERIES
 A-1-201.280 ISS S

EFFECTIVE 1-11-08

W+ SERIES MODEL W+140/50 3-STAGES CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 7.9"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

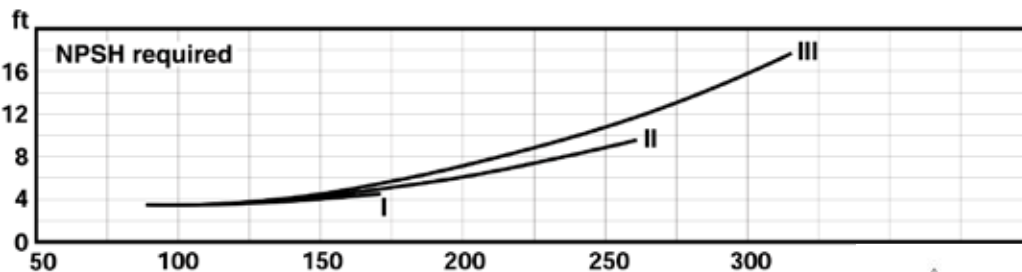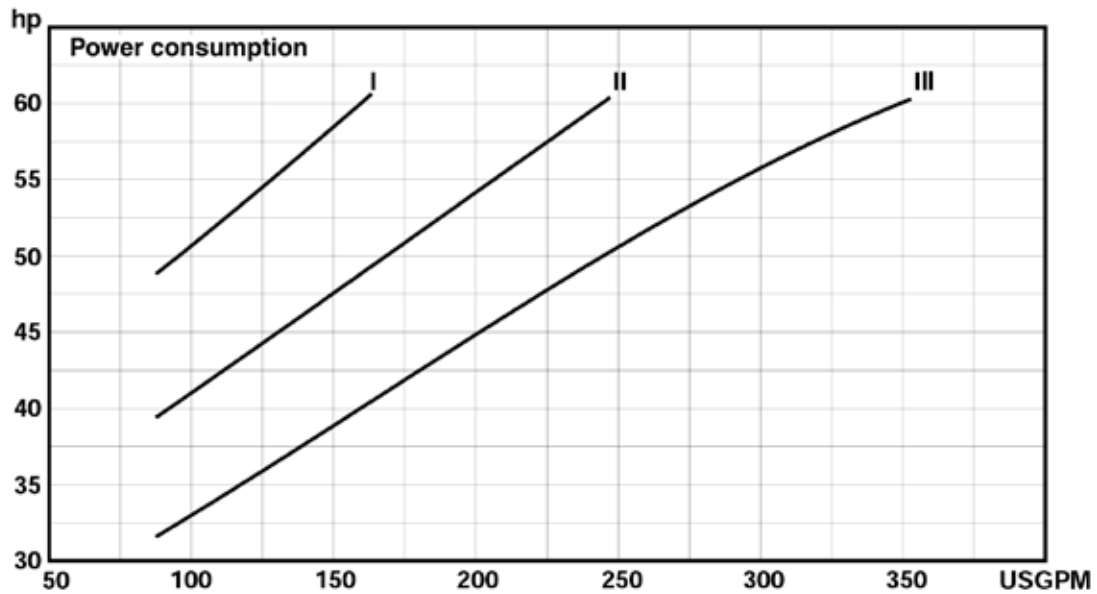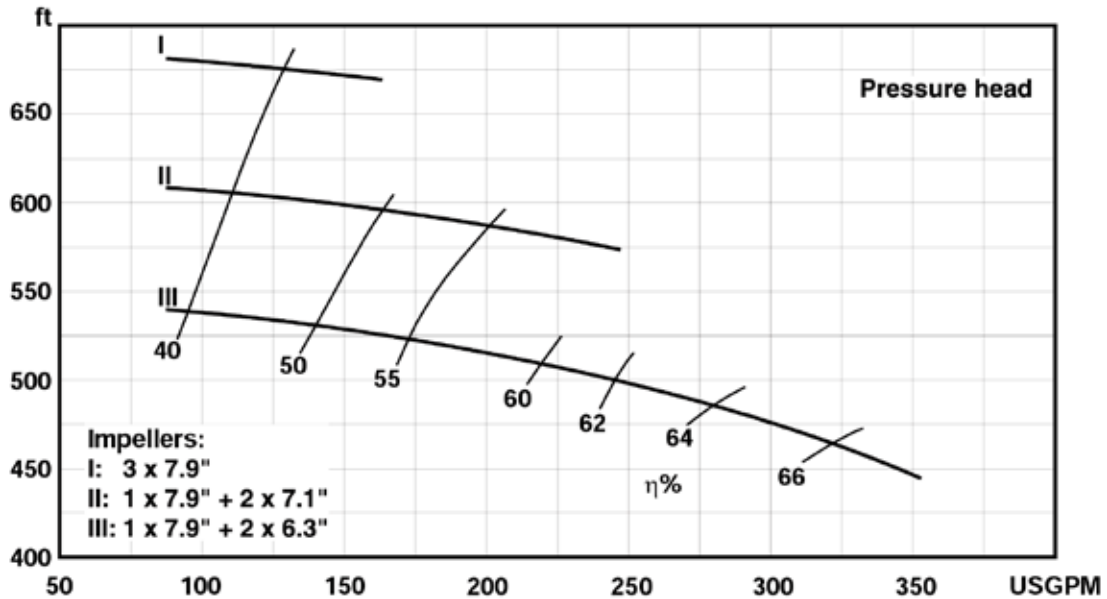

Triplex Sales
1-847-839-8442
www.triplexsales.com



Based in Charlotte, North Carolina, SPX FLOW, Inc. (NYSE: FLOW) is a multi-industry manufacturing leader. For more information, please visit www.spxflow.com

SPX FLOW

611 Sugar Creek Road
Delavan, WI 53115

P: (262) 728-1900 or (800) 252-5200

F: (262) 728-4904 or (800) 252-5012

E: answers.us@spxflow.com

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com.

The green "y" and "x" are trademarks of SPX FLOW, Inc.

ISSUED 02/2016 7020-01-06-2010-US

COPYRIGHT © 2016 SPX FLOW, Inc.

