

SPXFLOW

Triplex Sales
1-847-839-8442
www.triplexsales.com



V² Series

CENTRIFUGAL PUMPS



APV[®]

Sanitary Centrifugal Pumps - V² Series

APV Fluid Handling offers an economical solution to an increasing range of pumping applications: the V² Series — a simplified, maintenance-friendly and efficient centrifugal pump featuring a four-blade, fully open, non-clog impeller that is the optimum design for sanitary service.

SPX FLOW, Inc. (NYSE:FLOW) is a leading manufacturer of innovative flow technologies, many of which help define the industry standard in the market segments they serve. From its headquarters in Charlotte, North Carolina, it operates a sales and support network, centers of manufacturing excellence, and advanced engineering facilities, throughout the world. Its cutting-edge flow components and process equipment portfolio includes a wide range of pumps, valves, heat exchangers, mixers, homogenizers, separators, filters, UHT, and drying technology that meet many application needs. Its expert engineering capability also makes it a premium supplier of customized solutions and complete, turn-key packages to meet the most exacting of installation demands.

Incorporating many leading brands, SPX FLOW has a long history of serving the food and beverage, power and energy, and industrial market sectors. Its designs and engineered solutions help customers drive efficiency and productivity, increase quality and reliability, and meet the latest regulatory demands. In-depth understanding of applications and processes, state-of-the-art Innovation Centers, and advanced pilot/testing technology further assist in optimizing processes and reducing timescales to reliably meet production targets.

To learn more about SPX FLOW capabilities, its latest technology innovations and complete service offerings, please visit www.spxflow.com.

FEATURES AND BENEFITS

- Meets all standards: Sanitary models are manufactured from FDA approved materials, meet the requirements of the 3-A Sanitary Standards, carry the BISSC seal of approval and are approved by the USDA Meat and Poultry Division.
- Choice of seal types: the V² pumps are available with three different seal types to accommodate various applications and ensure optimum seal performance for the product being pumped. The standard product seal for all models is Type 1, a positive drive, single mechanical design.
- Hydraulically balanced and externally mounted. It suits general purpose applications such as milk products, beverages, fruit juices, organic acids, alcohols, process water and vegetable oils.
- Engineered for in-place cleaning: All V² Series Centrifugal Pumps are engineered for modern cleaning and sanitizing techniques. The square impeller drive has grooves that allow circulation of cleaning and sanitizing solutions along the shaft and behind the impeller. The separate impeller and shaft design enhances cleaning and inspection. Pump disassembly is quick and easy for complete manual cleaning and inspection. Parts and assemblies are not difficult to align. No special tools are required.

MATERIALS

The casing has controlled wall thickness and dimensional accuracy throughout. The back plate is machined from stainless steel plate. A unique clamping assembly uses clamp rings with a self-locking internal angle that resists distortion and provides optimum sealing between the casing and back plate. The clamp rings are investment cast for greater strength than stamped clamp rings common to many sanitary pumps. A replaceable seat is provided in the back plate with optional seal types #2 and #5. This is reversible, providing a new wear surface without part replacement.



Typical product applications


OPTIONS AND ACCESSORIES

Connections

- Butt weld, plus five sanitary ferrule options
- 150 lb ANSI flange and male pipe thread for non-sanitary applications

Seal Options

- Type 2 APV product seal/ replaceable seat
 - Replaceable seat provides a harder, wear-resistant stationary seat for extended life
- Cascade Water Flush
 - For Type 1 and Type 2
 - Recommended for products containing fines or particulates: brines; low vacuums; where caramelization may occur (liquid sugars, HFCS, honey, syrups, molasses); and where flush water can discharge onto floor
- Type 5 contained water flush double seals (APV & John Crane)/ replaceable seat
 - Double inside/outside APV hydraulically balanced inside; John Crane 8B2 hydraulically balanced outside

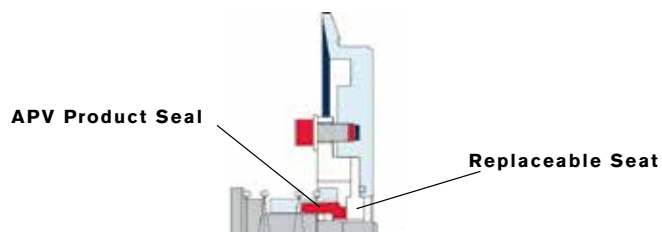

Other Pump Options

- Non-polished stainless steel surface (industrial applications)
- Case drain connections
- Stainless steel and painted carbon steel assemblies
- Stainless steel leg kit

Food and Beverage

Fruit Juices
Water
Beer
Organic Acids
Alcohols
Beverage Syrups
Tallow



Dairy

Milk
Cream
Ice Cream Mix



Emulsions

Sauces
Ketchup
Vinegar
Brine
Edible Oils
Yeast Slurry



Theory of Operation

12. Safety Guard

- Perforated stainless steel meets OSHA requirements
- Protects the shaft/seal area

17. Adapter Plate — Only on larger motor frames


14. Screw for Adapter


15. Shaft Collar

- Investment cast for strength with proprietary tapered clamp design to improve sealing and hold casing and back plate tight against adapter
- Fast disassembly without special tools

5. Casing Gasket

- Fully retained with roll bead on the gasket back which seals in the back plate groove for trouble-free positioning and sealing

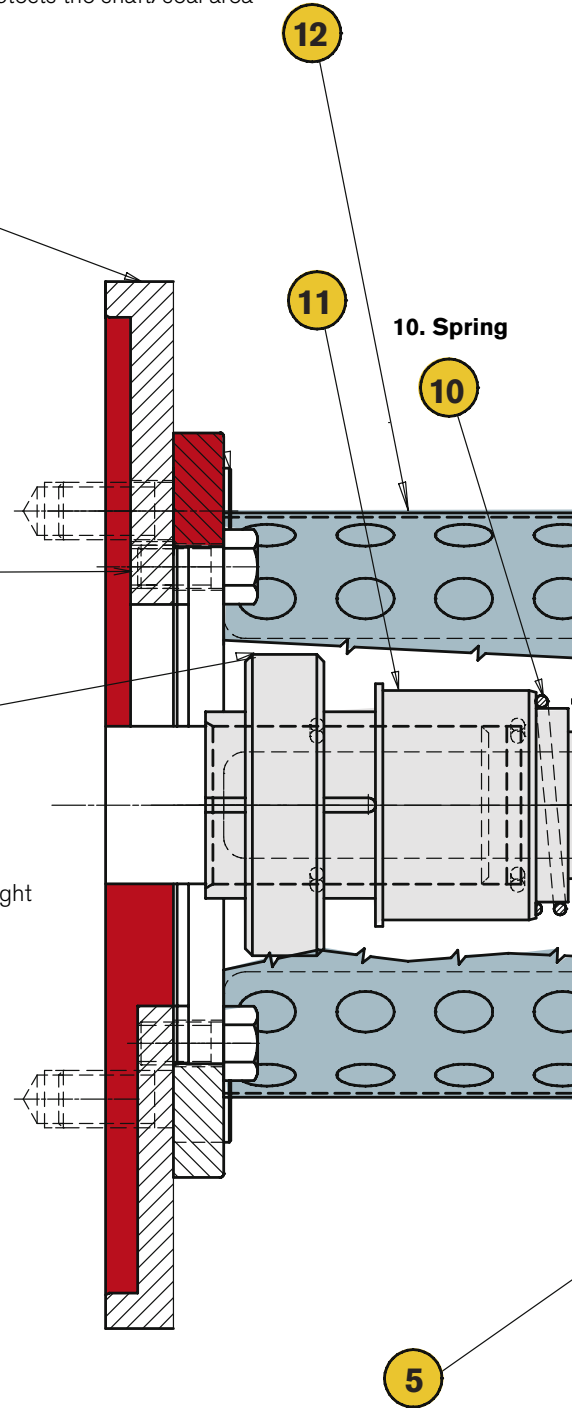

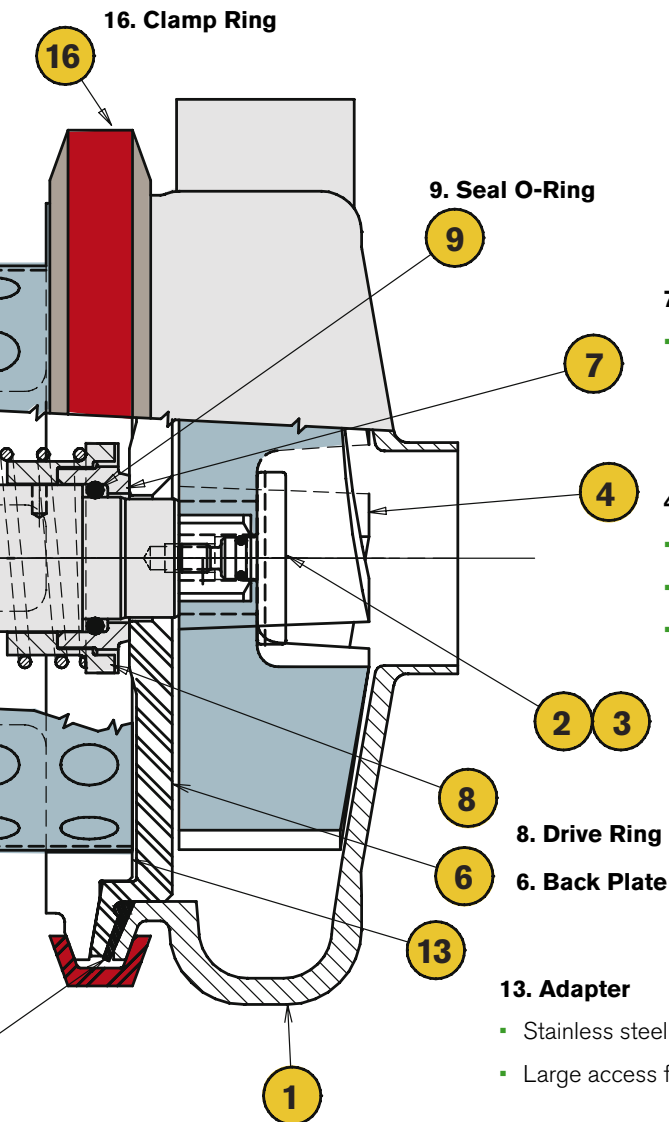

7. Shaft Seal

- Standard Type 1 seal is a single mechanical, externally mounted APV design with rotating carbon seat and stationary 316 stainless steel back plate. All seals are hydraulically balanced and positive driven

4. Impeller

- One piece design with 4-blade, reverse curve configuration
- Open impeller eye area improves pumping efficiency and lowers NPSHR
- Square shaft and hub design promotes easy assembly/disassembly and provides maximum driving contact surface

2 & 3. Impeller Pin and O-Ring

- Stainless steel, attaches directly to the end of the shaft

8. Drive Ring

6. Back Plate

13. Adapter

- Stainless steel construction for strength and rigidity
- Large access for shaft positioning

1. Casing

- Heavy, single piece investment casting with uniform wall thickness
- Volute design provides good efficiency over a wide range of operating conditions
- Discharge can be rotated through 360°
- Interior of casing is free of sharp corners for easy, complete cleaning


SPECIFICATIONS

Data summary listed are inlet, outlet and impeller sizes, along with the Best Efficiency Point and shut-off head for each model. Capacity (Q) shown in U.S. gpm. Impeller diameter shown is maximum. Certified dimensional drawings are available on request.

| PUMP MODELS | UNIT | PUMP CASING | | MAXIMUM IMPELLER SIZE | PERFORMANCE AT B.E.P. | | | |
|------------------|------|----------------|------------------------------------|-----------------------|--------------------------|------------------------------------|--------------------------|--|
| | | INLET X OUTLET | 1750 RPM | | 3500 RPM | | | |
| | | | - Q - GPM M ³ /HR | | - HEAD - FT METERS | - Q - GPM M ³ /HR | - HEAD - FT METERS | |
| 4V ² | in | 1.5 X 1.5 | 3.8 | 37 | 13 | 74 | 45 | |
| | mm | 38 X 38 | 97 | 8.4 | 5 | 16.8 | 13.7 | |
| 4V ² | in | 2 X 1.5 | 3.8 | 42 | 13 | 84 | 52 | |
| | mm | 51 X 38 | 97 | 9.5 | 4 | 19.1 | 15.8 | |
| 6V ² | in | 2 X 1.5 | 5.8 | 85 | 33 | 158 | 143 | |
| | mm | 51 X 38 | 148 | 19.3 | 10 | 35.9 | 43.6 | |
| 6V ² | in | 2.5 X 1.5 | 5.8 | 80 | 36 | 160 | 144 | |
| | mm | 63 X 38 | 148 | 18.2 | 11 | 36.3 | 43.9 | |
| 8V ² | in | 2 X 1.5 | 7.8 | 117 | 37 | 234 | 266 | |
| | mm | 51 X 38 | 200 | 26.6 | 20.4 | 53.2 | 81.7 | |
| 8V ² | in | 3 X 2 | 7.8 | 137 | 63 | 274 | 252 | |
| | mm | 76 X 51 | 200 | 31.1 | 19.2 | 62.2 | 76.8 | |
| 8VS ² | in | 3 X 2 | 7.8 | 231 | 63 | 462 | 252 | |
| | mm | 76 X 51 | 200 | 52.5 | 19.2 | 104.9 | 76.8 | |

ADDITIONAL TECHNICAL DATA

FLOW, HEAD (BEST EFFICIENCY POINT) @ RPM

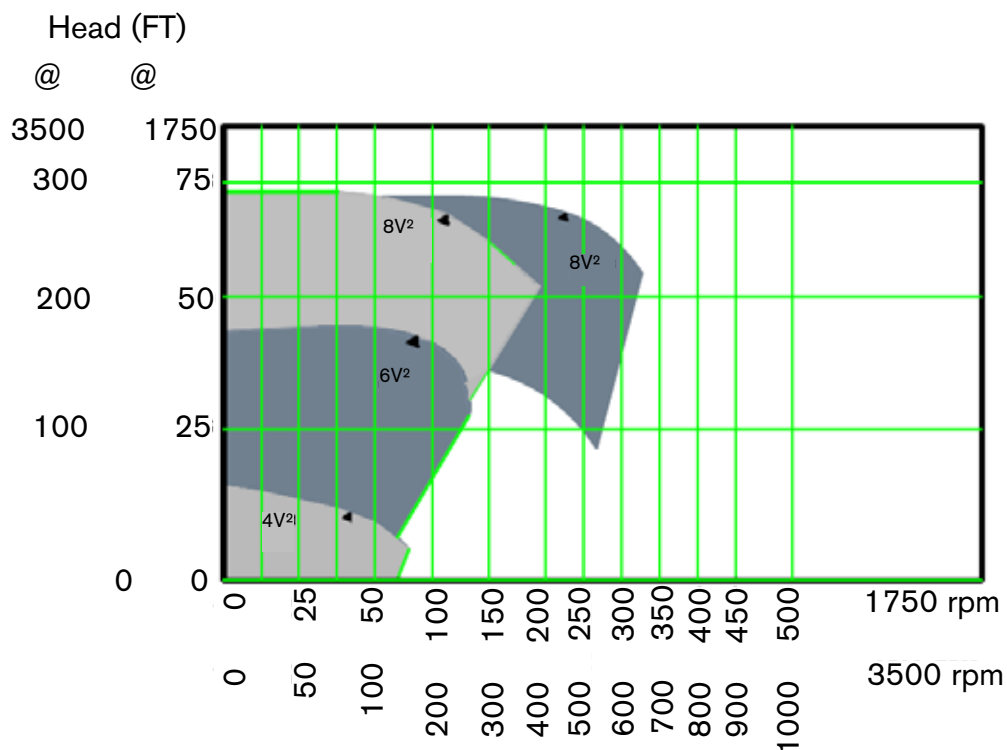


Composite Performance Curves for the V² Series

The arrows indicate the Best Efficiency Point (B.E.P.) for various pump models.

Individual performance curves are available upon request.

DIMENSIONS

* These dimensions are based on smallest size inlet and outlet with S-Line connections and standard TEFC motor. Refer to factory supplied drawings for detailed dimensions showing other connection sizes and types

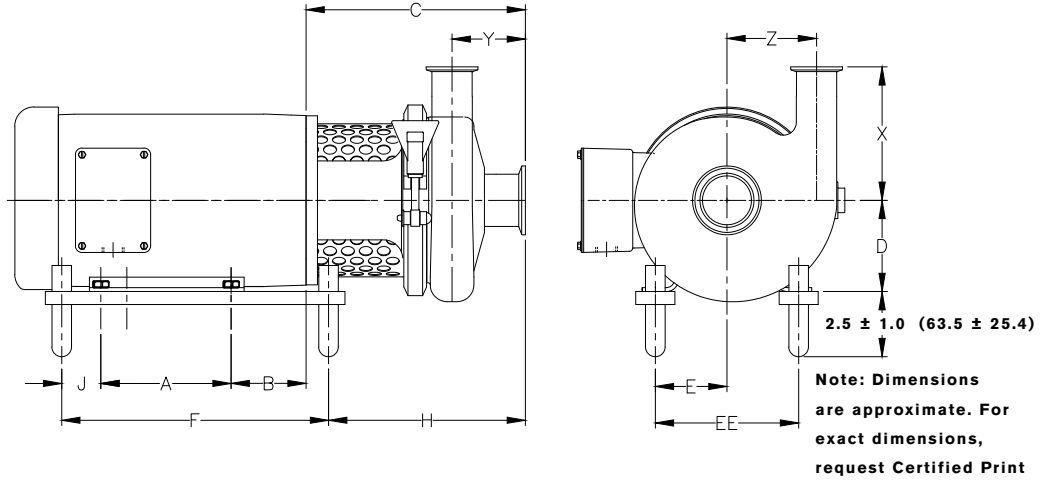

| PUMP SIZE | MOTOR FRAME | A | B | C | D | E | F | H | J | X | Y | Z |
|------------------------------|----------------|----------------|----------------|----------------|---------------|----------------|----------------|---------------|---------------|---------------|---------------|---------------|
| | | IN (mm) | | | | | | | | | | |
| 4V ² (1.5X1.5) | 56C | 3.00 (76.20) | 2.75 (69.85) | 7.26 (184.40) | 3.50 (88.9) | 2.44 (61.98) | 8.50 (215.90) | 6.01 (152.65) | 1.50 (38.10) | 4.23 (107.44) | 2.64 (67.06) | 2.44 (61.98) |
| | 143TC | 4.00 (101.60) | 2.25 (57.15) | 7.26 (184.40) | 3.50 (88.9) | 2.75 (69.85) | 10.25 (260.35) | 5.76 (146.30) | 2.50 (63.50) | 4.23 (107.44) | 2.64 (67.06) | 2.44 (61.98) |
| | 145TC | 5.00 (127.00) | 2.25 (57.15) | 7.26 (184.40) | 3.50 (88.9) | 2.75 (69.85) | 10.25 (260.35) | 5.76 (146.30) | 1.50 (38.10) | 4.23 (107.44) | 2.64 (67.06) | 2.44 (61.98) |
| | 182TC | 4.50 (114.30) | 2.75 (69.85) | 7.85 (199.39) | 4.50 (114.3) | 3.75 (95.25) | 11.37 (288.80) | 6.23 (158.24) | 2.50 (63.50) | 4.23 (107.44) | 2.64 (67.06) | 2.44 (61.98) |
| | 184TC | 5.50 (139.70) | 2.75 (69.85) | 7.85 (199.39) | 4.50 (114.3) | 3.75 (95.25) | 11.37 (288.80) | 6.23 (158.24) | 1.50 (38.10) | 4.23 (107.44) | 2.64 (67.06) | 2.44 (61.98) |
| 6V ² (2x1.5) | 56C | 3.00 (76.20) | 2.75 (69.85) | 8.32 (211.33) | 3.50 (88.9) | 2.44 (61.98) | 8.50 (215.90) | 7.19 (182.63) | 1.50 (38.10) | 5.13 (130.30) | 2.81 (71.37) | 3.44 (87.38) |
| | 143TC | 4.00 (101.60) | 2.25 (57.15) | 8.32 (211.33) | 3.50 (88.9) | 2.75 (69.85) | 10.25 (260.35) | 6.82 (173.23) | 2.50 (63.50) | 5.13 (130.30) | 2.81 (71.37) | 3.44 (87.38) |
| | 145TC | 5.00 (127.00) | 2.25 (57.15) | 8.32 (211.33) | 3.50 (88.9) | 2.75 (69.85) | 10.25 (260.35) | 6.82 (173.23) | 1.50 (38.10) | 5.13 (130.30) | 2.81 (71.37) | 3.44 (87.38) |
| | 182TC | 4.50 (114.30) | 2.75 (69.85) | 8.91 (226.31) | 4.50 (114.3) | 3.75 (95.25) | 11.37 (288.80) | 7.29 (185.17) | 2.50 (63.50) | 5.13 (130.30) | 2.81 (71.37) | 3.44 (87.38) |
| | 184TC | 5.50 (139.70) | 2.75 (69.85) | 8.91 (226.31) | 4.50 (114.3) | 3.75 (95.25) | 11.37 (288.80) | 7.29 (185.17) | 1.50 (38.10) | 5.13 (130.30) | 2.81 (71.37) | 3.44 (87.38) |
| | 213TC | 5.50 (139.70) | 3.50 (88.90) | 8.91 (226.31) | 5.25 (133.35) | 4.25 (107.95) | 13.88 (352.55) | 7.03 (178.56) | 3.00 (76.20) | 5.13 (130.30) | 2.81 (71.37) | 3.44 (87.38) |
| | 215TC | 7.00 (177.80) | 3.50 (88.90) | 8.91 (226.31) | 5.25 (133.35) | 4.25 (107.95) | 13.88 (352.55) | 7.03 (178.56) | 1.50 (38.10) | 5.13 (130.30) | 2.81 (71.37) | 3.44 (87.38) |
| 8V ² (2x1.5) | 254TC | 8.25 (209.55) | 4.25 (107.95) | 9.66 (245.36) | 6.25 (152.40) | 5.00 (127) | 18.00 (457.20) | 7.41 (188.21) | 3.25 (82.55) | 5.13 (130.30) | 2.81 (71.37) | 3.44 (87.38) |
| | 256TC | 10.00 (254.00) | 4.25 (107.95) | 9.66 (245.36) | 6.25 (152.40) | 5.00 (127) | 18.00 (457.20) | 7.41 (188.21) | 1.50 (38.10) | 5.13 (130.30) | 2.81 (71.37) | 3.44 (87.38) |
| | 143TC | 4.00 (101.60) | 2.25 (57.15) | 9.32 (236.73) | 3.50 (88.9) | 2.75 (69.85) | 10.25 (260.35) | 7.82 (198.63) | 2.50 (63.50) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) |
| | 145TC | 5.00 (127.00) | 2.25 (57.15) | 9.32 (236.73) | 3.50 (88.9) | 2.75 (69.85) | 10.25 (260.35) | 7.82 (198.63) | 1.50 (38.10) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) |
| | 182TC | 4.50 (114.30) | 2.75 (69.85) | 9.91 (251.71) | 4.50 (114.3) | 3.75 (95.25) | 11.37 (288.80) | 8.29 (210.57) | 2.50 (63.50) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) |
| | 184TC | 5.50 (139.70) | 2.75 (69.85) | 9.91 (251.71) | 4.50 (114.3) | 3.75 (95.25) | 11.37 (288.80) | 8.29 (210.57) | 1.50 (38.10) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) |
| | 213TC | 5.50 (139.70) | 3.50 (88.90) | 9.91 (251.71) | 5.25 (133.35) | 4.25 (107.95) | 13.88 (352.55) | 8.03 (203.96) | 3.00 (76.20) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) |
| | 215TC | 7.00 (177.80) | 3.50 (88.90) | 9.91 (251.71) | 5.25 (133.35) | 4.25 (107.95) | 13.88 (352.55) | 8.03 (203.96) | 1.50 (38.10) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) |
| | 254TC | 8.25 (209.55) | 4.25 (107.95) | 9.91 (251.71) | 6.25 (152.40) | 5.00 (127) | 18.00 (457.20) | 7.66 (194.56) | 3.25 (82.55) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) |
| | 256TC | 10.00 (254.00) | 4.25 (107.95) | 9.91 (251.71) | 6.25 (152.40) | 5.00 (127) | 18.00 (457.20) | 7.66 (194.56) | 1.50 (38.10) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) |
| | 284TSC | 9.50 (241.30) | 4.75 (120.65) | 10.28 (261.11) | 7.00 (177.8) | 5.50 (139.7) | 19.00 (482.60) | 8.53 (216.66) | 3.00 (76.20) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) |
| 286TSC | 11.00 (279.40) | 4.75 (120.65) | 10.28 (261.11) | 7.00 (177.8) | 5.50 (139.7) | 19.00 (482.60) | 8.53 (216.66) | 1.50 (38.10) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) | |
| 324TSC | 10.50 (266.70) | 5.25 (133.35) | 10.47 (265.94) | 8.00 (203.2) | 6.25 (152.40) | 20.50 (520.70) | 8.72 (221.49) | 3.00 (76.20) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) | |
| 326TSC | 12.00 (304.80) | 5.25 (133.35) | 10.47 (265.94) | 8.00 (203.2) | 6.25 (152.40) | 20.50 (520.70) | 8.72 (221.49) | 1.50 (38.10) | 7.13 (181.10) | 3.00 (76.20) | 4.44 (112.78) | |
| 8VS ² (3x2) | 143TC | 4.00 (101.60) | 2.25 (57.15) | 9.75 (247.65) | 3.50 (88.9) | 2.75 (69.85) | 10.25 (260.35) | 8.25 (209.55) | 2.50 (63.50) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| | 145TC | 5.00 (127.00) | 2.25 (57.15) | 9.75 (247.65) | 3.50 (88.9) | 2.75 (69.85) | 10.25 (260.35) | 8.25 (209.55) | 1.50 (38.10) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| | 182TC | 4.50 (114.30) | 2.75 (69.85) | 10.34 (262.64) | 4.50 (114.3) | 3.75 (95.25) | 11.37 (288.80) | 8.72 (221.49) | 2.50 (63.50) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| | 184TC | 5.50 (139.70) | 2.75 (69.85) | 10.34 (262.64) | 4.50 (114.3) | 3.75 (95.25) | 11.37 (288.80) | 8.72 (221.49) | 1.50 (38.10) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| | 213TC | 5.50 (139.70) | 3.50 (88.90) | 10.34 (262.64) | 5.25 (133.35) | 4.25 (107.95) | 13.88 (352.55) | 8.46 (214.88) | 3.00 (76.20) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| | 215TC | 7.00 (177.80) | 3.50 (88.90) | 10.34 (262.64) | 5.25 (133.35) | 4.25 (107.95) | 13.88 (352.55) | 8.46 (214.88) | 1.50 (38.10) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| | 254TC | 8.25 (209.55) | 4.25 (107.95) | 10.34 (262.64) | 6.25 (152.40) | 5.00 (127) | 18.00 (457.20) | 8.09 (205.49) | 3.25 (82.55) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| | 256TC | 10.00 (254.00) | 4.25 (107.95) | 10.34 (262.64) | 6.25 (152.40) | 5.00 (127) | 18.00 (457.20) | 8.09 (205.49) | 1.50 (38.10) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| | 284TSC | 9.50 (241.30) | 4.75 (120.65) | 10.72 (272.29) | 7.00 (177.8) | 5.50 (139.7) | 19.00 (482.60) | 8.97 (227.84) | 3.00 (76.20) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| | 286TSC | 11.00 (279.40) | 4.75 (120.65) | 10.72 (272.29) | 7.00 (177.8) | 5.50 (139.7) | 19.00 (482.60) | 8.97 (227.84) | 1.50 (38.10) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| | 324TSC | 10.50 (266.70) | 5.25 (133.35) | 10.91 (277.11) | 8.00 (203.2) | 6.25 (152.40) | 20.50 (520.70) | 9.16 (232.66) | 3.00 (76.20) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) |
| 326TSC | 12.00 (304.80) | 5.25 (133.35) | 10.91 (277.11) | 8.00 (203.2) | 6.25 (152.40) | 20.50 (520.70) | 9.16 (232.66) | 1.50 (38.10) | 7.13 (181.10) | 3.25 (82.55) | 4.63 (117.60) | |

**Shipping weight approximate and does not include motor.



Global locations

AMERICAS

SPX FLOW

611 Sugar Creek Road
Delavan, WI 53115
United States of America
+1 262 728 1900

APAC

SPX FLOW

7F, No. 1568, Huashan Road,
Shanghai, 200052
China
+86 21 2208 5888

EMEA

SPX FLOW

ul. Grunwaldzka 229
85-451 Bydgoszcz
Poland
+48 52 525 99 00

Based in Charlotte, North Carolina, SPX FLOW, Inc. (NYSE: FLOW) is a multi-industry manufacturing leader. For more information, please visit www.spxflow.com

SPX FLOW

611 Sugar Creek Road
Delavan, WI 53115
P: (262) 728-1900 or (800) 252-5200
F: (262) 728-4904 or (800) 252-5012
E: answers.us@spxflow.com

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com.

The green "y" and "x" are trademarks of SPX FLOW, Inc.

ISSUED 08/2016 7009-01-08-2008-US

COPYRIGHT © 2016 SPX FLOW, Inc.